


5-BAND GRAPHIC EQUALIZER AMPLIFIER

The KA2223 is a monolithic integrated circuit consisting of an operational amplifier with five resonant circuits and a active filter, and it is suitable for radio-cassette tape recorders, car stereos or music center audio systems.

FEATURES

- Tone control with independent adjustment of each band through an external capacitor.
- Gain control through an external variable resistor.
- Increasing the bands by adding resonant circuit or using two KA2223 in series.
- Low noise ($V_{NO}=7\mu V$: Typ. Flat).
- Low distortion (THD=0.02% Typ. f=1KHz Flat).
- Large allowable input ($V_i=2.3V$: Typ, $V_{cc}=9V$, f = 1KHz Flat).
- Operating supply voltage range: $V_{cc}=5V \sim 13V$

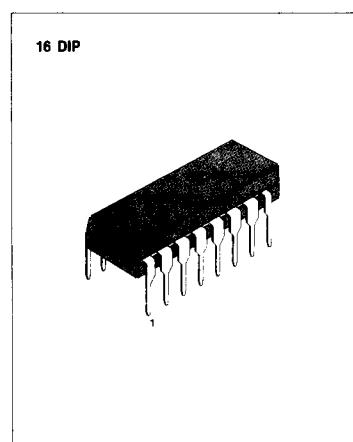

ORDERING INFORMATION

BLOCK DIAGRAM

Device	Package	Operating Temperature
KA2223	16 DIP	- 20°C ~ + 70°C

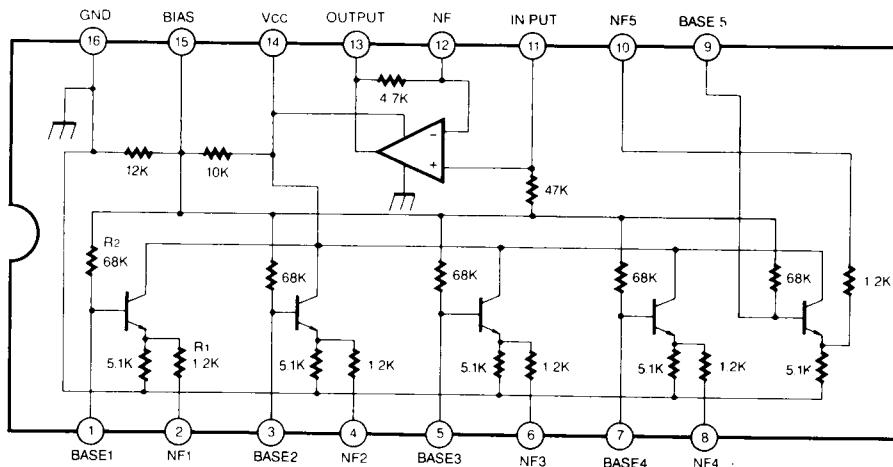


Fig. 1

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Characteristic	Symbol	Value	Unit
Supply Voltage	V _{CC}	20	V
Power Dissipation	P _D	700	mW
Operating Temperature	T _{OPR}	-20 ~ +70	°C
Storage Temperature	T _{STG}	-55 ~ +125	°C

ELECTRICAL CHARACTERISTICS(T_a = 25°C, V_{CC} = 9V unless otherwise specified)

Characteristic	Symbol	Test		Min	Typ	Max	Unit	
		f(Hz)	Conditions					
Quiescent Circuit Current	I _{CCQ}		V _i = 0	3.0	5.2	8.0	mA	
Voltage Gain	Flat	G _V (Flat)	1K	V _i = -10dBm	-3.8	-0.8	2.2	dB
	Boost	G _V (Boost)	108	V _i = -10dBm	8	10.5	12	dB
			343					dB
			1.08K					dB
			3.43K					dB
	Cut	G _V (Cut)	10.8K		-12	-10.5	-8	dB
			108					dB
			343					dB
			1.08K					dB
			3.43K					dB
Total Harmonic Distortion	THD	1K	V _i = 1V		0.02	0.1	%	
Output Noise Voltage	V _{NO}	Flat, Input Short BW(-3dB) = 10Hz ~ 30KHz			7.0	30	µV	

TEST CIRCUIT

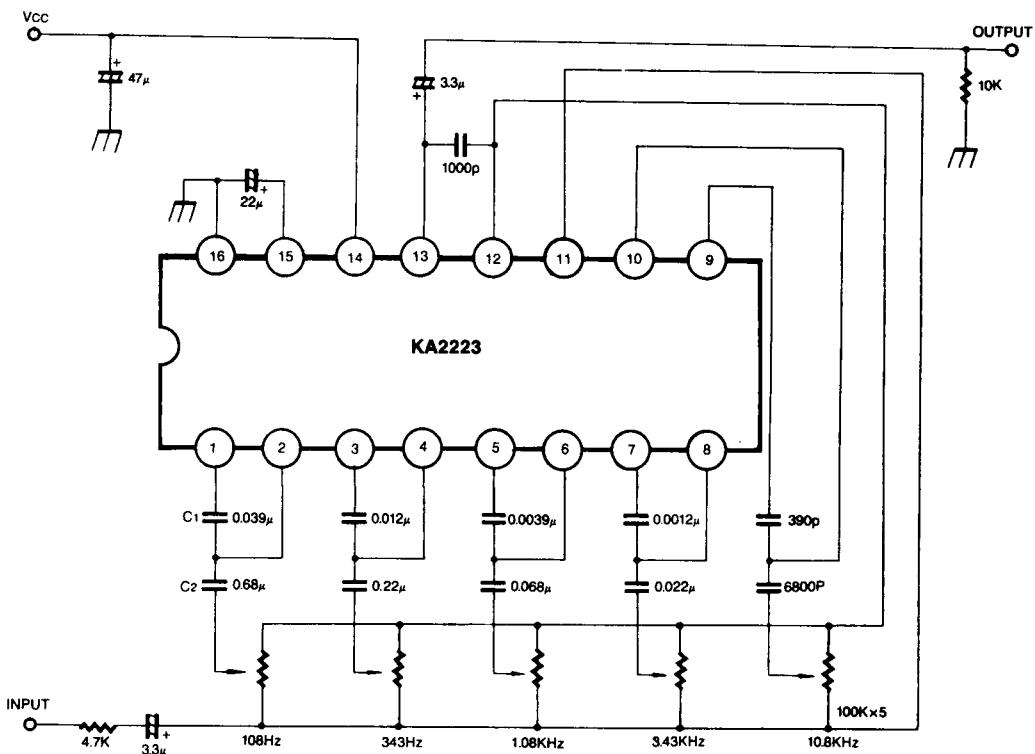



Fig. 2

$$\text{Resonant frequency } f_0 = \frac{1}{2\pi\sqrt{R_1 R_2 C_1 C_2}}$$

(R₁ = 1.2K, R₂ = 68K on-chip resistor)

APPLICATION CIRCUIT

1. 7 BAND

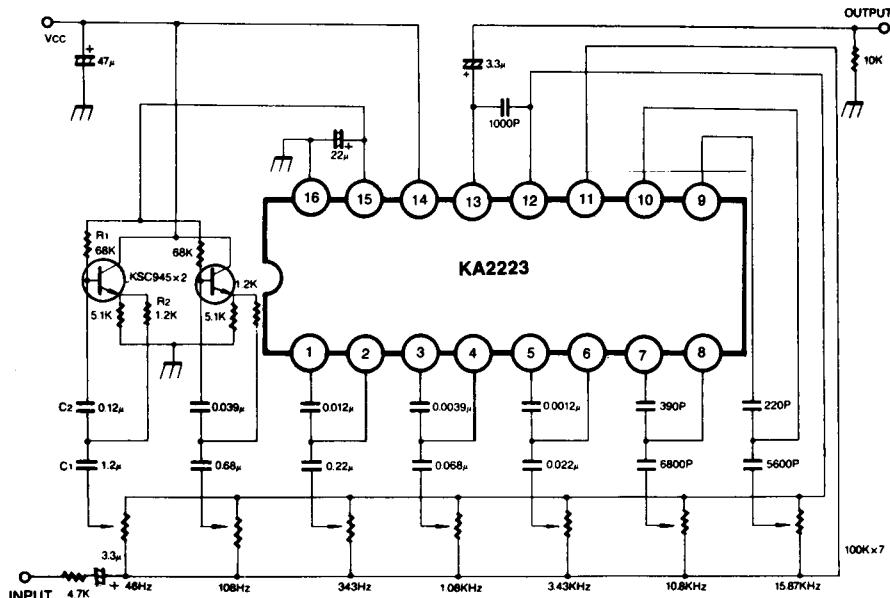

3

Fig. 3

2. 10 BAND

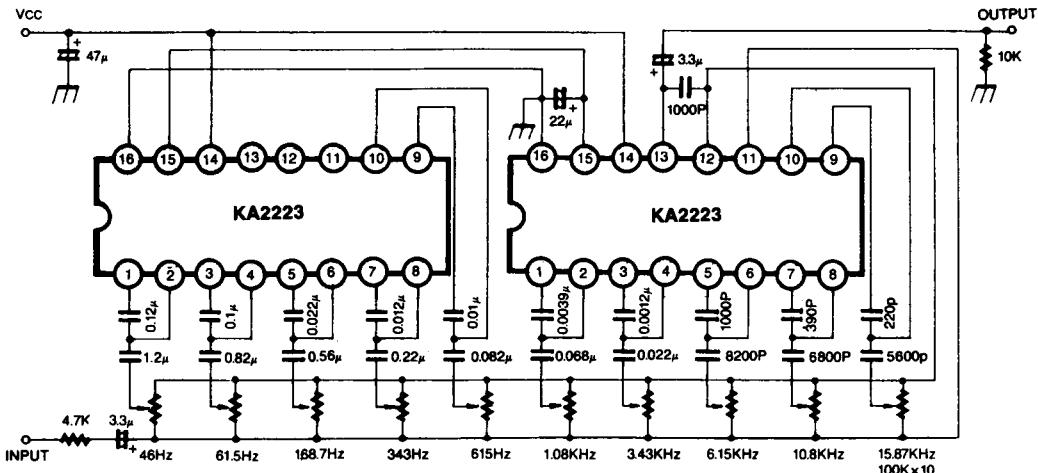


Fig. 4