

Toshiba Bipolar Digital Integrated Circuit Silicon Monolithic

## TD62081APG,TD62081AFG,TD62082APG,TD62082AFG, TD62083APG,TD62083AFG,TD62084APG,TD62084AFG

### 8ch Darlington Sink Driver


The TD62081APG/AFG Series are high-voltage, high-current darlington drivers comprised of eight NP darlington pairs. All units feature integral clamp diodes for switching inductive loads. Applications include relay, hammer, lamp and display (LED) drivers.

### Features

- Output current (single output)  
500 mA (max) (TD62081APG/AFG series)
- High sustaining voltage output  
50 V (min) (TD62081APG/AFG series)
- Output clamp diodes
- Inputs compatible with various types of logic.
- Package type-APG: DIP-18 pin
- Package type-AFG: SOP-18 pin


Type	Input Base Resistor	Designation
TD62081APG/AFG	External	General purpose
TD62082APG/AFG	10.5-k $\Omega$ + 7 V Zener diode	14 V to 25 V PMOS
TD62083APG/AFG	2.7 k $\Omega$	TTL, 5 V CMOS
TD62084APG/AFG	10.5 k $\Omega$	6 V to 15 V PMOS, CMOS

TD62081APG, TD62082APG  
TD62083APG, TD62084APG

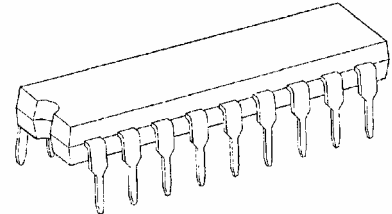

DIP18-P-300-2.54D

TD62081AFG, TD62082AFG  
TD62083AFG, TD62084AFG

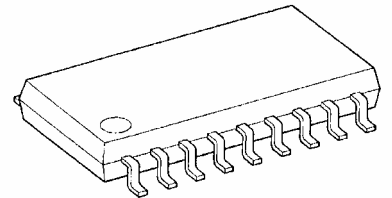


SOP18-P-375-1.27

#### Weight


DIP18-P-300-2.54D: 1.47 g (typ.)

SOP18-P-375-1.27 : 0.41 g (typ.)

### Pin Connection (top view)

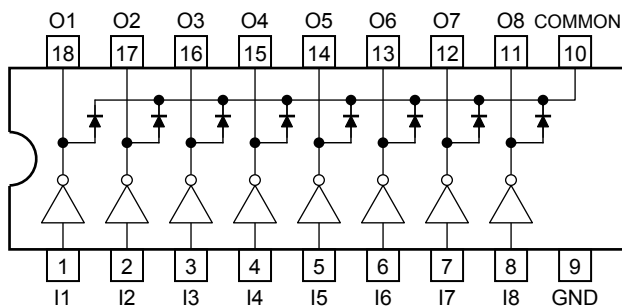

## Schematics (each driver)

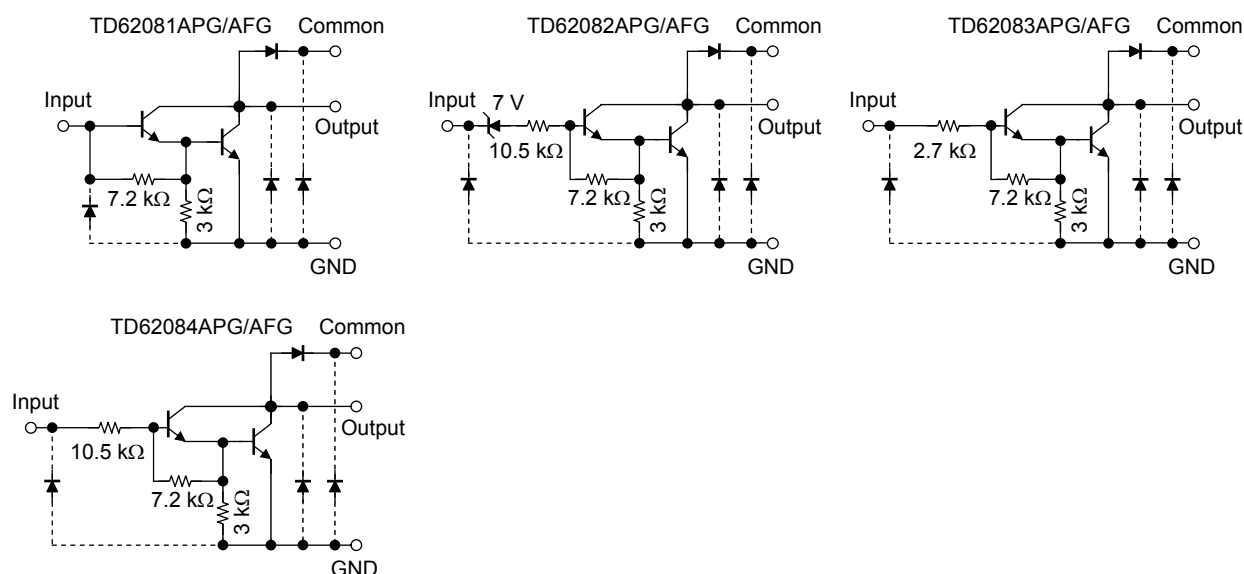

Note: The input and output parasitic diodes cannot be used as clamp diodes.

## Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit
Output sustaining voltage		$V_{CE(SUS)}$	-0.5 to 50	V
Output current		$I_{OUT}$	500	mA/ch
Input voltage		$V_{IN}$ (Note 1)	-0.5 to 30	V
Input current		$I_{IN}$ (Note 2)	25	mA
Clamp diode reverse voltage		$V_R$	50	V
Clamp diode forward current		$I_F$	500	mA
Power dissipation	APG	$P_D$	1.47	W
	AFG		0.96	
Operating temperature		$T_{opr}$	-40 to 85	°C
Storage temperature		$T_{stg}$	-55 to 150	°C

Note 1: Except TD62081APG/AFG

Note 2: Only TD62081APG/AFG

**Recommended Operating Conditions (Ta = -40 to 85°C)**

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Output sustaining voltage		V <sub>CE</sub> (SUS)		0	—	50	V
Output current	APG	I <sub>OUT</sub>	T <sub>pw</sub> = 25 ms, Duty = 10% 8 circuits	0	—	347	mA/ch
			T <sub>pw</sub> = 25 ms, Duty = 50% 8 circuits	0	—	123	
	AFG		T <sub>pw</sub> = 25 ms, Duty = 10% 8 circuits	0	—	268	
			T <sub>pw</sub> = 25 ms, Duty = 50% 8 circuits	0	—	90	
Input voltage	Except TD62081APG/AFG	V <sub>IN</sub>		0	—	30	V
Input voltage (Output on)	TD62082APG/AFG	V <sub>IN</sub> (ON)		14	—	30	V
	TD62083APG/AFG			2.5	—	30	
	TD62084APG/AFG			8	—	30	
Input voltage (Output off)	TD62082APG/AFG	V <sub>IN</sub> (OFF)		0	—	7.4	V
	TD62083APG/AFG			0	—	0.5	
	TD62084APG/AFG			0	—	1.0	
Input current	Only TD62081APG/AFG	I <sub>IN</sub>		0	—	5	mA
Clamp diode reverse voltage		V <sub>R</sub>		—	—	50	V
Clamp diode forward current		I <sub>F</sub>		—	—	400	mA
Power dissipation	APG	P <sub>D</sub>		—	—	0.52	W
	AFG			—	—	0.4	


**Electrical Characteristics (Ta = 25°C)**

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output leakage current	I <sub>CEX</sub>	1	V <sub>CE</sub> = 50 V	Ta = 25°C	—	50	μA
				Ta = 85°C	—	100	
				V <sub>IN</sub> = 6 V	—	500	
				V <sub>IN</sub> = 1 V	—	500	
Collector-emitter saturation voltage	V <sub>CE (sat)</sub>	2	I <sub>OUT</sub> = 350 mA, I <sub>IN</sub> = 500 μA	—	1.3	1.6	V
			I <sub>OUT</sub> = 200 mA, I <sub>IN</sub> = 350 μA	—	1.1	1.3	
			I <sub>OUT</sub> = 100 mA, I <sub>IN</sub> = 250 μA	—	0.9	1.1	
Input current	I <sub>IN (ON)</sub>	2	V <sub>IN</sub> = 17 V	—	0.82	1.25	mA
			V <sub>IN</sub> = 3.85 V	—	0.93	1.35	
			V <sub>IN</sub> = 5 V	—	0.35	0.5	
			V <sub>IN</sub> = 12 V	—	1.0	1.45	
	I <sub>IN (OFF)</sub>	4	I <sub>OUT</sub> = 500 μA, Ta = 85°C	50	65	—	μA
Input voltage (Output on)	V <sub>IN (ON)</sub>	5	V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 300 mA	—	—	13	V
			V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 200 mA	—	—	2.4	
			V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 250 mA	—	—	2.7	
			V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 300 mA	—	—	3.0	
			V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 125 mA	—	—	5.0	
			V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 200 mA	—	—	6.0	
			V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 275 mA	—	—	7.0	
			V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 350 mA	—	—	8.0	
DC current transfer ratio	h <sub>FE</sub>	2	V <sub>CE</sub> = 2 V, I <sub>OUT</sub> = 350 mA	1000	—	—	
Clamp diode reverse current	I <sub>R</sub>	6	Ta = 25°C (Note)	—	—	50	μA
			Ta = 85°C (Note)	—	—	100	
Clamp diode forward voltage	V <sub>F</sub>	7	I <sub>F</sub> = 350 mA	—	—	2.0	V
Input capacitance	C <sub>IN</sub>	—		—	15	—	pF
Turn-on delay	t <sub>ON</sub>	8	R <sub>L</sub> = 125 Ω, V <sub>OUT</sub> = 50 V	—	0.1	—	μs
Turn-off delay	t <sub>OFF</sub>		R <sub>L</sub> = 125 Ω, V <sub>OUT</sub> = 50 V	—	0.2	—	


 Note: V<sub>R</sub> = V<sub>R</sub> max

## Test Circuit


### 1. $I_{CEX}$

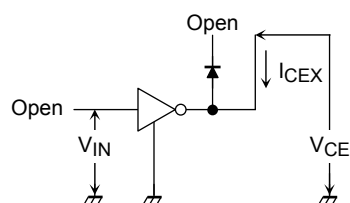


### 2. $V_{CE} (sat)$ , $h_{FE}$

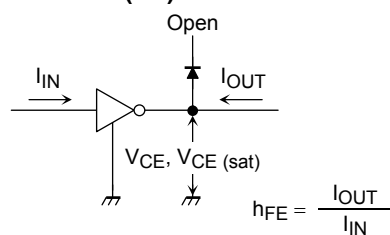


### 3. $I_{IN} (ON)$




### 4. $I_{IN} (OFF)$




### 5. $V_{IN} (ON)$




### 6. $I_R$



### 7. $V_F$



8.  $t_{ON}$ ,  $t_{OFF}$

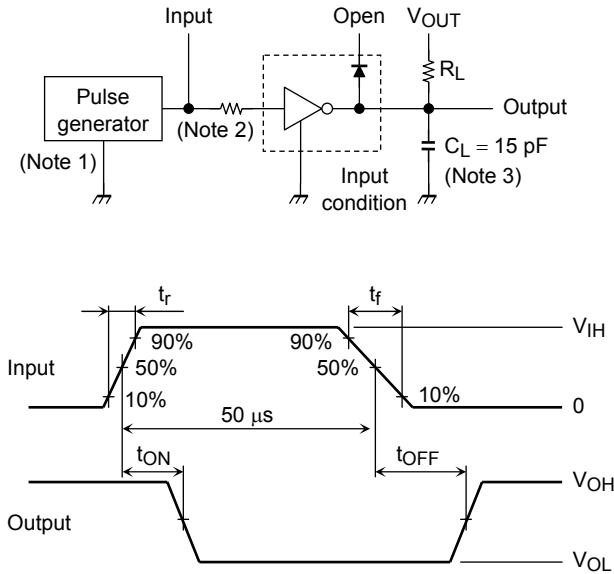

Note 1: Pulse width  $50\text{ }\mu\text{s}$ , duty cycle 10%  
Output impedance  $50\text{ }\Omega$ ,  $t_r \leq 5\text{ ns}$ ,  $t_f \leq 10\text{ ns}$







Note 2: See below.  
Input condition




Type Number	R1	$V_{IH}$
TD62081APG/AFG	$2.7\text{ k}\Omega$	3 V
TD62082APG/AFG	$0\text{ }\Omega$	13 V
TD62083APG/AFG	$0\text{ }\Omega$	3 V
TD62084APG/AFG	$0\text{ }\Omega$	8 V

Note 3:  $C_L$  includes probe and jig capacitance

Precautions for Using

This IC does not include built-in protection circuits for excess current or overvoltage.  
If this IC is subjected to excess current or overvoltage, it may be destroyed.  
Hence, the utmost care must be taken when systems which incorporate this IC are designed.  
Utmost care is necessary in the design of the output line, COMMON and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

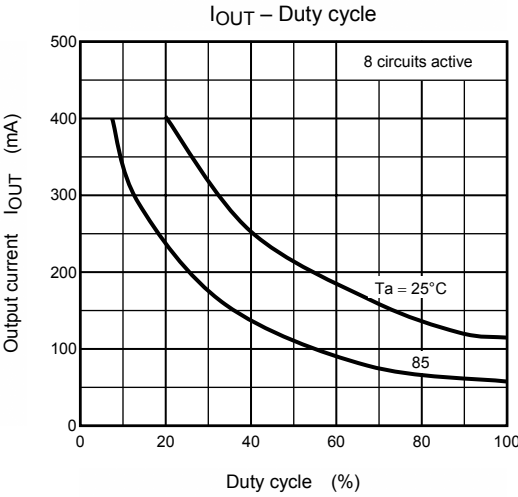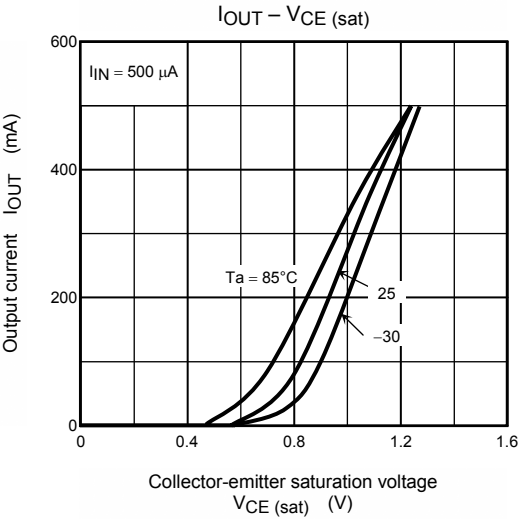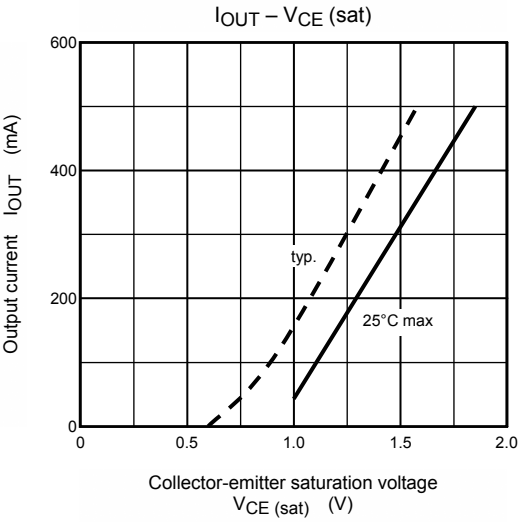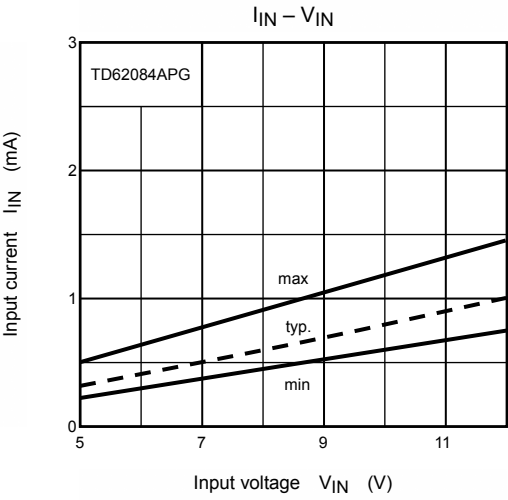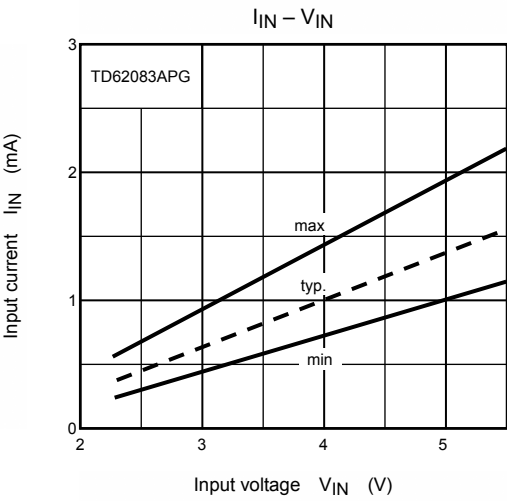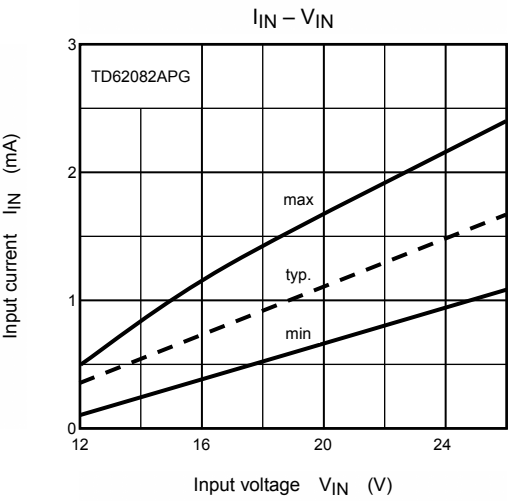

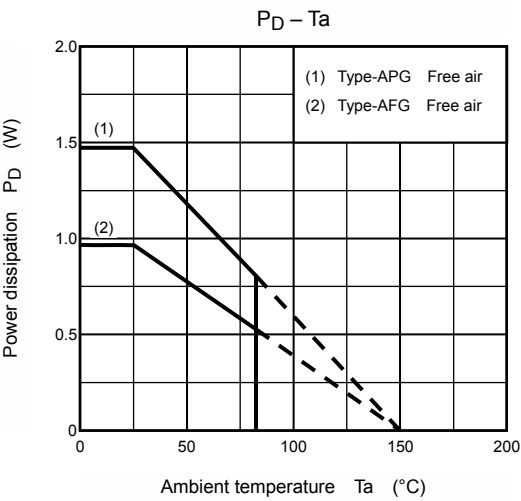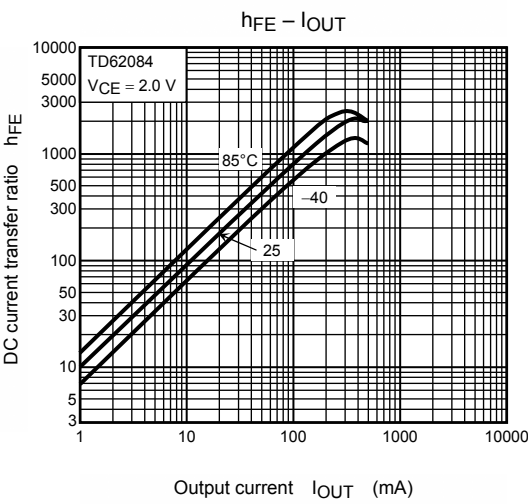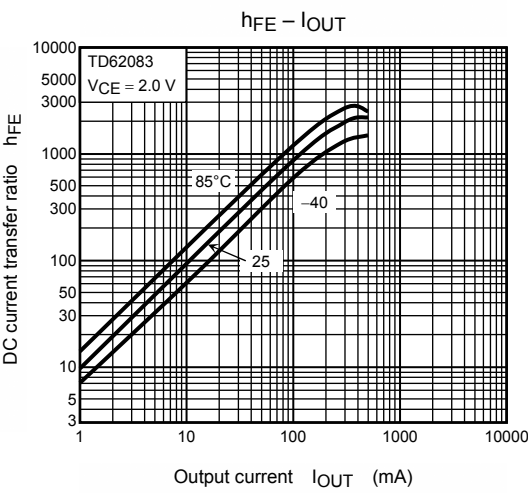




## Package Dimensions

DIP18-P-300-2.54D

Unit : mm


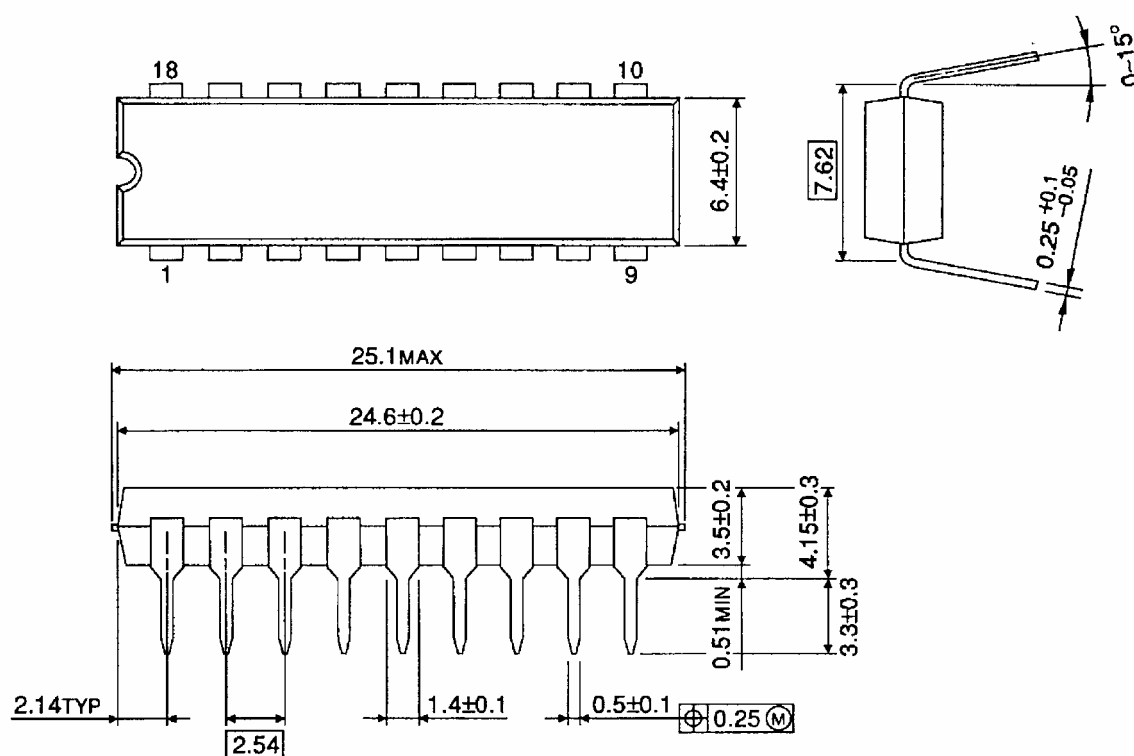


Weight: 1.47 g (typ.)

Package Dimensions

SOP18-P-375-1.27

Unit : mm

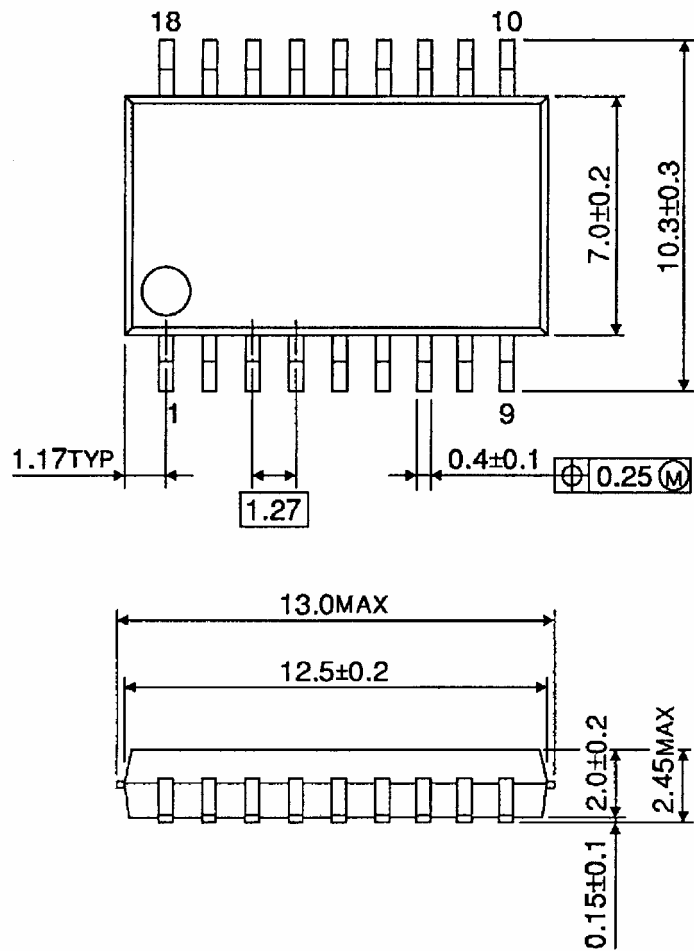

Weight: 0.41 g (typ.)

About solderability, following conditions were confirmed

- Solderability

- (1) Use of Sn-63Pb solder Bath
  - solder bath temperature = 230°C
  - dipping time = 5 seconds
  - the number of times = once
  - use of R-type flux
- (2) Use of Sn-3.0Ag-0.5Cu solder Bath
  - solder bath temperature = 245°C
  - dipping time = 5 seconds
  - the number of times = once
  - use of R-type flux

## RESTRICTIONS ON PRODUCT USE

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.