


PNP Transistor

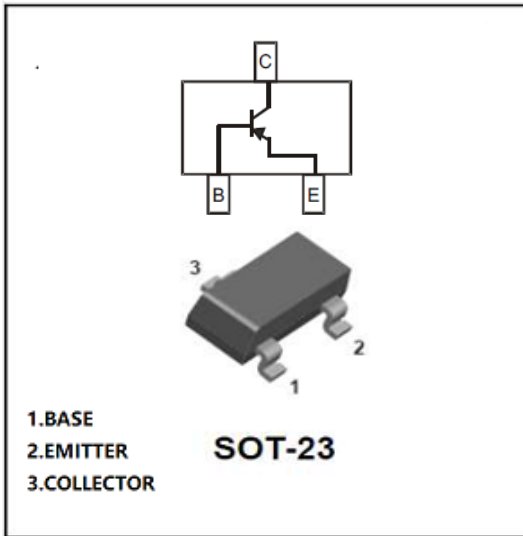

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- High Conductance
- Surface mount package ideally Suited for Automatic Insertion

Mechanical Data

- **Package:** SOT-23
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** 9B

■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	-40
Collector-Emitter Voltage	V_{CEO}	V	-40
Emitter-Base Voltage	V_{EBO}	V	-5
Collector Current	I_C	A	-1
Collector Power Dissipation	P_C	mW	300
Junction Temperature	T_j	°C	150
Storage Temperature	T_{stg}	°C	-55 to +150



PMMT591A

■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V_{CBO}	V	$I_C = -10\mu A, I_E = 0$	-40		
Collector-emitter breakdown voltage	V_{CEO^*}	V	$I_C = -1mA, I_B = 0$	-40		
Emitter-base breakdown voltage	V_{EBO}	V	$I_E = -10\mu A, I_C = 0$	-5		
Collector-emitter cut-off current	I_{CEO}	nA	$V_{CE} = -30V, I_B = 0$			-100
Collector-base cut-off current	I_{CBO}	nA	$V_{CB} = -30V, I_E = 0$			-100
Emitter-base cut-off current	I_{EBO}	nA	$V_{EB} = -5V, I_C = 0$			-100
DC current gain	h_{FE}		$V_{CE} = -5V, I_C = -1mA$	300		
	h_{FE}		$V_{CE} = -5V, I_C = -100mA$	300		800
	h_{FE}		$V_{CE} = -5V, I_C = -500mA$	250		
	h_{FE}		$V_{CE} = -5V, I_C = -1A$	160		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C = -100mA, I_B = -1mA$			-0.2
	$V_{CE(sat)}$	V	$I_C = -500mA, I_B = -20mA$			-0.35
	$V_{CE(sat)}$	V	$I_C = -1A, I_B = -100mA$			-0.5
Base-emitter saturation voltage	$V_{BE(sat)}$	V	$I_C = -1A, I_B = -50mA$			-1.1
Base-emitter voltage	V_{BE}	V	$V_{CE} = -5V, I_C = -1A$			-1
Collector-base output capacitance	C_{ob}	pF	$V_{CB} = -10V, f = 1MHz$			12
Transition frequency	f_T	MHz	$V_{CE} = -10V, I_C = -50mA, f = 100MHz$	150		

■ Ordering Information (Example)


PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
PMMT591A	F2	Approximate 0.008	3000	30000	120000	7" reel




PMMT591A

■ Characteristics (Typical)


Static Characteristic

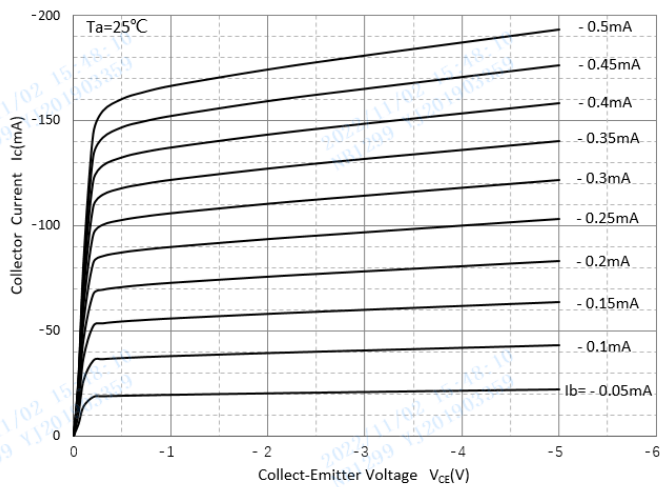


DC Current Gain

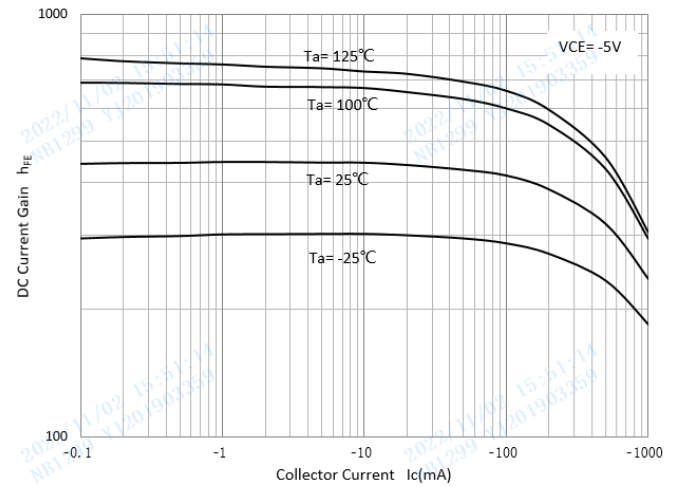


Collector-Emitter Saturation Voltage

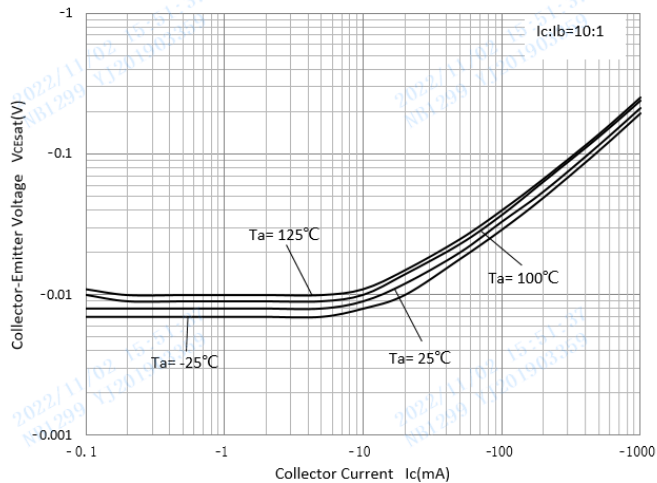


Base-Emitter Saturation Voltage

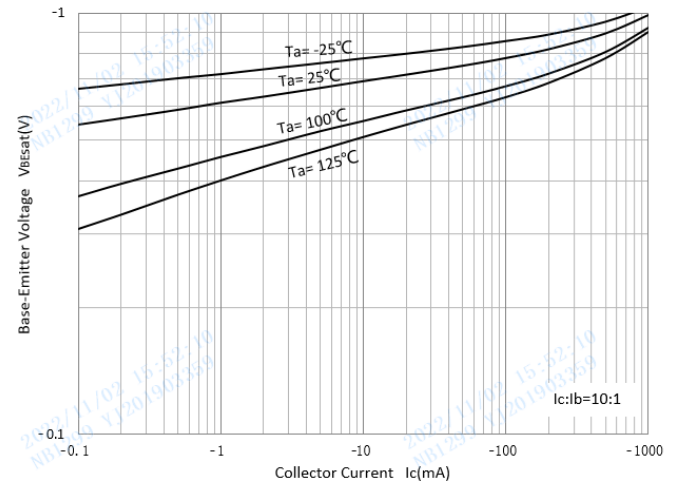


Base-Emitter On Voltage

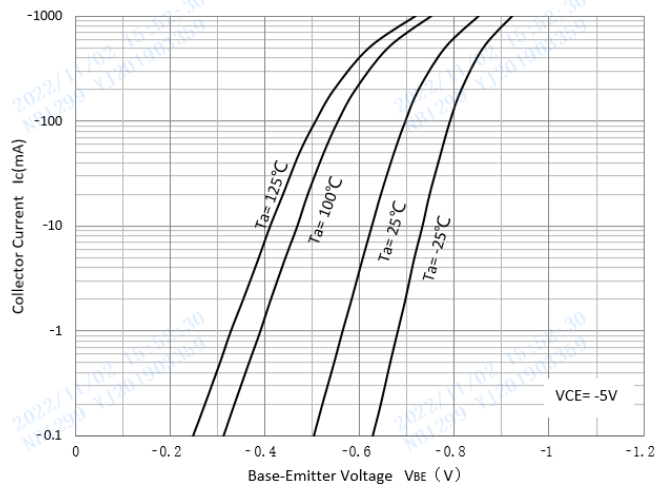


$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

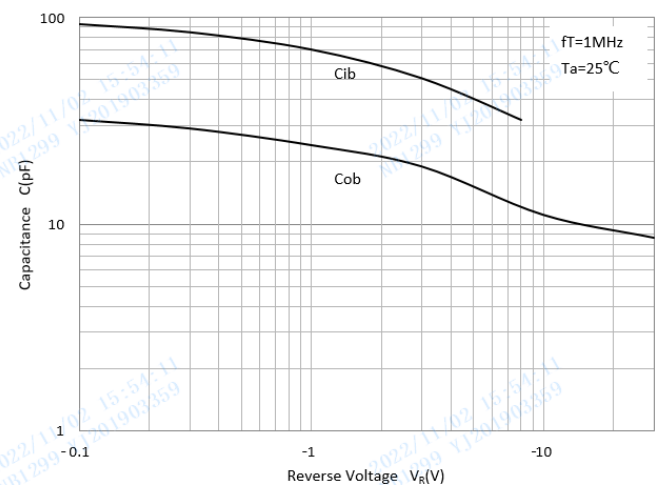

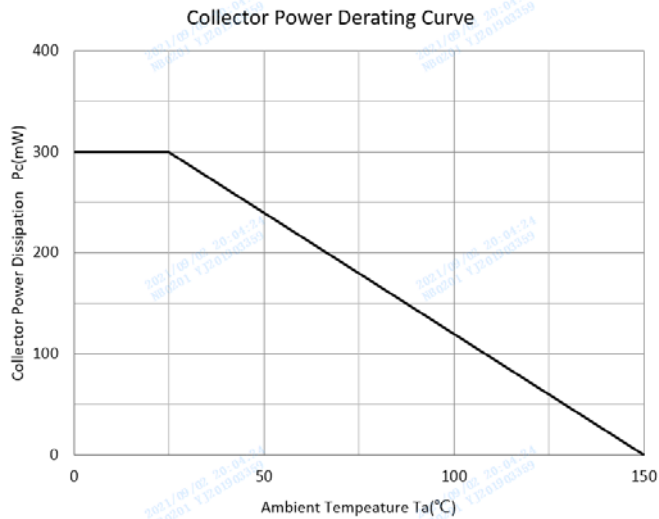


■SOT-23 Package Outline Dimensions

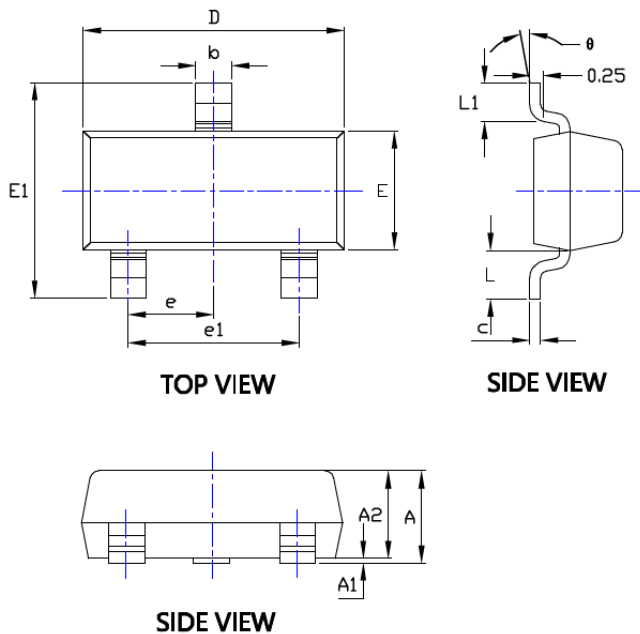

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

■SOT-23 Soldering Footprint

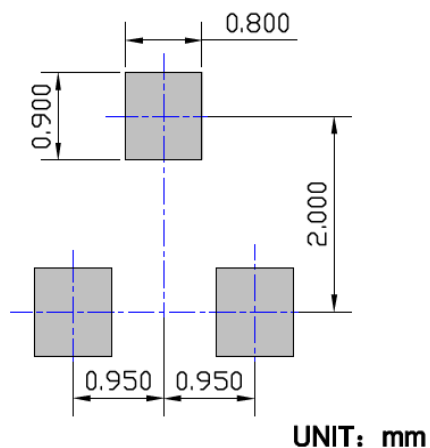



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.