


SC

Chip type, Standard Series


- Chip type higher capacitance in larger case size
- Designed for surface mounting on high density PC board
- Applicable to automatic insertion machine using carrier tape
- Complied to the RoHS directive

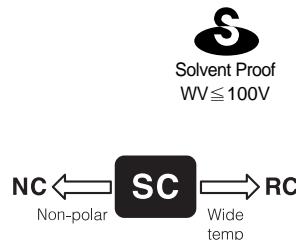

| Item | Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|---|----------------|----------------|----------------|----------------|----------------|----------------|-----------|------|------|------|------|------|------|--|--|--|--|--|--|--|--|--|--|--|--|
| Operating temperature range | -40 ~ +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage current max. | WV \leq 100 I = 0.01CV or 3 μ A whichever is greater (after 2 minutes) WV \geq 160 I = 0.04CV + 100 μ A(after 1 minutes) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance tolerance | $\pm 20\%$ at 120Hz, 20°C | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dissipation factor max. (at 120Hz, 20°C) | WV | 4 | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | 160 | 200 | 250 | 400 | 450 | | | | | | | | | | | | |
| | tan δ | 0.35 (0.40) | 0.28 (0.35) | 0.20 (0.24) | 0.16 (0.20) | 0.13 (0.16) | 0.12 (0.15) | 0.09 (0.12) | 0.12 | 0.12 | 0.20 | 0.20 | 0.20 | 0.25 | 0.25 | | | | | | | | | | | | |
| | () : Small size between two size in dimension table and over the 6.3×5.8(ØD × L) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Low temperature characteristics (Impedance ratio at 120Hz) | WV | 4 | 6.3 | 10 | 16 | 25 | 35 ~ 100 | 160 ~ 250 | 400 ~ 450 | | | | | | | | | | | | | | | | | | |
| | Z-25°C/Z+20°C | 6 | 5 | 4 | 3 | 2 | 2 | 3 | 6 | | | | | | | | | | | | | | | | | | |
| | Z-40°C/Z+20°C | 12 | 10 | 8 | 6 | 4 | 3 | 6 | 10 | | | | | | | | | | | | | | | | | | |
| Load life (after application of the rated voltage for 2000 hours at 85°C) | Leakage current | Less than specified value | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance change | Within $\pm 20\%$ of initial value (Small size : $\pm 25\%$) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | tan δ | Less than 200% of the specified value | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shelf life(at 85°C) | After 1000 hours no load test, leakage current, capacitance and tan δ are same as load life value. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Resistance to soldering heat | The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 30 seconds. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Leakage current | Less than specified value | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance change | Within $\pm 10\%$ of initial value | | | | | | | | | | | | | | | | | | | | | | | | | |
| | tan δ | Less than specified value | | | | | | | | | | | | | | | | | | | | | | | | | |

DRAWING

Unit : mm

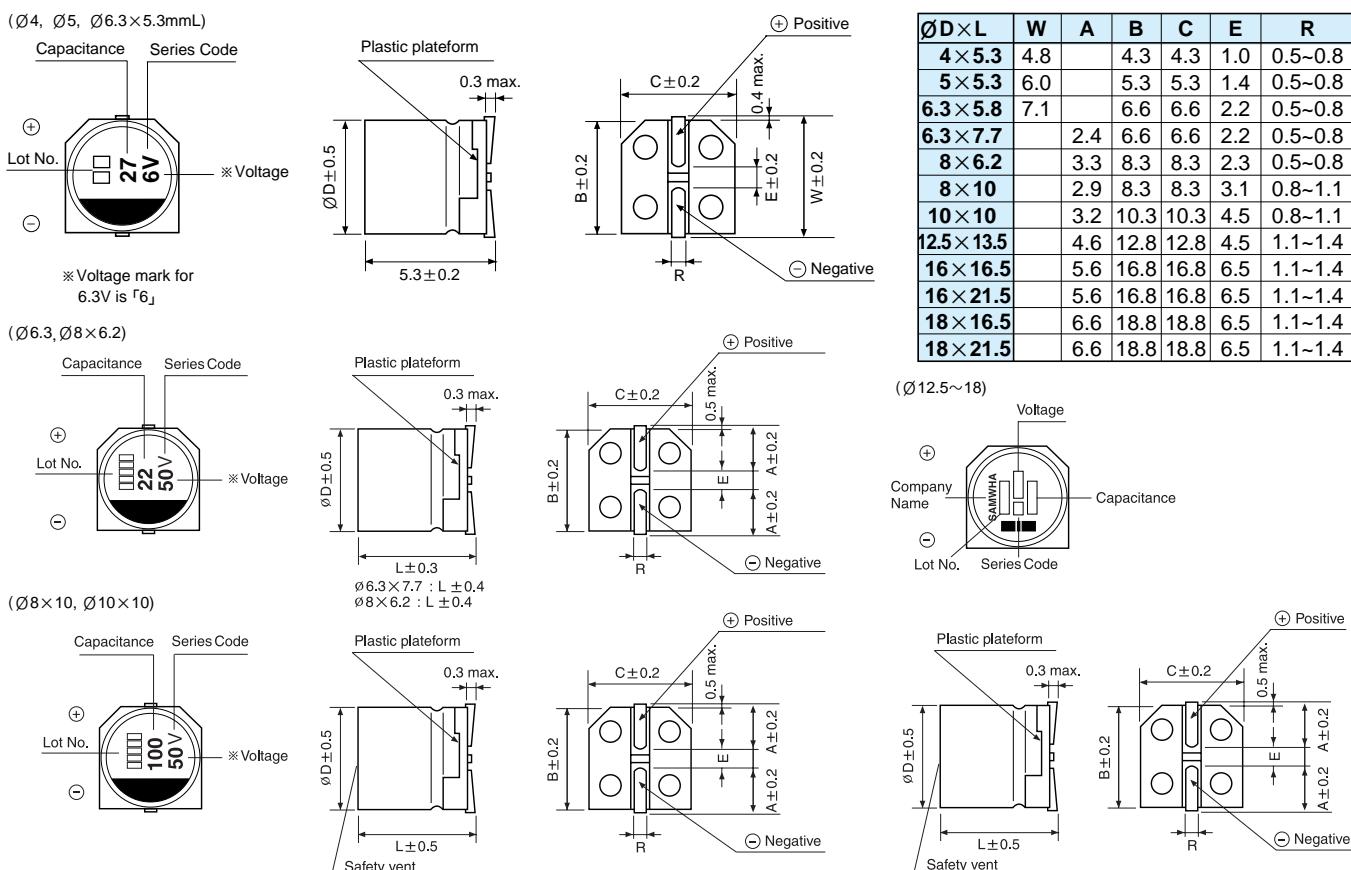

SC series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

| μF | WV | 4 | 6.3 | 10 | 16 | 25 | 35 | 50 | | |
|---------------|---------|-------|-----------|---------|-----------|---------|-----------|---------|-----------|-------|
| 0.1 | | | | | | | | | 3×5.3 | 2.4 |
| | | | | | | | | | 4×5.3 | 3.2 |
| 0.22 | | | | | | | | | 3×5.3 | 3.5 |
| | | | | | | | | | 4×5.3 | 4.7 |
| 0.33 | | | | | | | | | 3×5.3 | 4.3 |
| | | | | | | | | | 4×5.3 | 5.7 |
| 0.47 | | | | | | | | | 3×5.3 | 5.2 |
| | | | | | | | | | 4×5.3 | 6.8 |
| 1.0 | | | | | | | | | 3×5.3 | 7.5 |
| | | | | | | | | | 4×5.3 | 10 |
| 2.2 | | | | | | | | | 3×5.3 | 10 |
| | | | | | | | | | 4×5.3 | 11 |
| 3.3 | | | | | | | | | 3×5.3 | 12 |
| | | | | | | | | | 4×5.3 | 15 |
| 4.7 | | | | | | | | | 4×5.3 | 16 |
| | | | | | | | | | 4×5.3 | 18 |
| 10 | 3×5.3 | 13 | 3×5.3 | 16 | 4×5.3 | 21 | 4×5.3 | 21 | 4×5.3 | 24 |
| | 4×5.3 | 16 | 4×5.3 | 19 | | | 5×5.3 | 30 | 5×5.3 | 32 |
| 22 | 3×5.3 | 19 | 4×5.3 | 29 | 4×5.3 | 28 | 4×5.3 | 30 | 5×5.3 | 41 |
| | 4×5.3 | 24 | | | 5×5.3 | 36 | 5×5.3 | 41 | 6.3×5.3 | 53 |
| 33 | 4×5.3 | 29 | 4×5.3 | 30 | 4×5.3 | 34 | 5×5.3 | 43 | 5×5.3 | 50 |
| | | 5×5.3 | 41 | | 5×5.3 | 44 | 6.3×5.3 | 58 | 6.3×5.3 | 64 |
| 47 | 4×5.3 | 35 | 4×5.3 | 36 | 5×5.3 | 47 | 5×5.3 | 52 | 6.3×5.3 | 70 |
| | | 5×5.3 | 48 | 6.3×5.3 | 62 | 6.3×5.3 | 69 | 6.3×5.8 | 72 | 8×6.2 |
| 100 | 5×5.3 | 54 | 5×5.3 | 60 | 6.3×5.3 | 80 | 6.3×5.3 | 88 | 8×6.2 | 145 |
| | 6.3×5.3 | 68 | 6.3×5.3 | 82 | 6.3×5.8 | 82 | 6.3×5.8 | 91 | | |
| 220 | 6.3×5.3 | 93 | 6.3×5.8 | 91 | 6.3×7.7 | 173 | 6.3×7.7 | 162 | 8×10 | 232 |
| | | | | | 8×6.2 | 175 | 8×10 | 215 | 10×10 | 250 |
| 330 | | | 6.3×7.7 | 188 | 8×10 | 240 | 8×10 | 270 | 10×10 | 305 |
| | | | 8×6.2 | 190 | | | | | 10×10 | 360 |
| 470 | | | 8×10 | 265 | 8×10 | 290 | 8×10 | 307 | 10×10 | 400 |
| | | | | | | | 10×10 | 330 | 12.5×13.5 | 600 |
| 1000 | | | 8×10 | 370 | 10×10 | 454 | 12.5×13.5 | 710 | 12.5×13.5 | 820 |
| | | | 10×10 | 400 | | | | | 16×16.5 | 1000 |
| 1500 | | | 10×10 | 480 | 12.5×13.5 | 850 | 12.5×13.5 | 870 | 16×16.5 | 1060 |
| | | | | | | | | | 16×21.5 | 1170 |
| 2200 | | | 12.5×13.5 | 890 | 12.5×13.5 | 960 | 16×16.5 | 1150 | 16×21.5 | 1350 |
| | | | | | | | 18×16.5 | | 18×21.5 | 1550 |
| 3300 | | | 16×16.5 | 1200 | 16×16.5 | 1300 | 16×21.5 | 1450 | 18×21.5 | 1700 |
| | | | | | | | 18×16.5 | | | |
| 4700 | | | 16×16.5 | 1400 | 16×21.5 | 1500 | 18×21.5 | 1750 | | |
| | | | | | 18×16.5 | 1500 | | | | |
| 6800 | | | 16×21.5 | 1650 | 18×21.5 | 1850 | | | | |
| | | | 18×16.5 | 1650 | | | | | | |
| 10000 | | | 18×21.5 | 2000 | | | | | | |

SC series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

| μF | WV | 63 | 100 | 160 | 200 | 250 | 400 | 450 | | |
|---------------|-----------|-----|-----------|-----|-----------|-----|-----------|-----|---------|-----|
| 2.2 | | | | | | | | | 10×10 | 85 |
| 3.3 | | | 6.5×5.8 | 29 | | | | | 10×10 | 90 |
| | | | 6.3×5.8 | 35 | | | | | 10×10 | 100 |
| 4.7 | 6.3×5.8 | 31 | 8×6.2 | 40 | | | | | 10×10 | 115 |
| | | | 12.5×13.5 | 150 | 12.5×13.5 | 150 | 16×16.5 | 140 | 16×16.5 | 140 |
| 10 | 6.3×5.8 | 46 | 8×10 | 77 | 10×10 | 100 | 12.5×13.5 | 150 | 16×21.5 | 280 |
| | | | 12.5×13.5 | 240 | 12.5×13.5 | 260 | 16×16.5 | 300 | 16×21.5 | 275 |
| 22 | 8×6.2 | 96 | 8×10 | 100 | 12.5×13.5 | 240 | 12.5×13.5 | 260 | 16×21.5 | 300 |
| | | | 12.5×13.5 | 350 | 12.5×13.5 | 350 | 16×16.5 | 500 | 18×21.5 | 490 |
| 33 | 8×10 | 117 | 10×10 | 130 | 12.5×13.5 | 260 | 16×16.5 | 350 | 16×16.5 | 345 |
| | | | 12.5×13.5 | 400 | 12.5×13.5 | 415 | 16×21.5 | | | |
| 47 | 10×10 | 140 | 10×10 | 155 | 16×16.5 | 400 | 16×16.5 | 415 | 16×21.5 | |
| | | | 12.5×13.5 | 350 | 12.5×13.5 | 350 | 16×16.5 | 505 | 18×21.5 | |
| 68 | 10×10 | 160 | 12.5×13.5 | 350 | 12.5×13.5 | 350 | 16×16.5 | 500 | 18×21.5 | |
| | | | 12.5×13.5 | 350 | 12.5×13.5 | 350 | 16×16.5 | 505 | 18×21.5 | |
| 100 | 12.5×13.5 | 370 | 12.5×13.5 | 420 | 12.5×13.5 | 420 | 16×21.5 | 590 | 18×21.5 | 590 |
| | | | 12.5×13.5 | 550 | 12.5×13.5 | 665 | 18×16.5 | | | |
| 220 | 12.5×13.5 | 550 | 16×21.5 | 665 | 16×21.5 | 665 | 18×16.5 | | | |
| | | | 18×16.5 | | | | | | | |
| 330 | 16×16.5 | 680 | 18×21.5 | 825 | 18×21.5 | 825 | 18×21.5 | | | |
| | | | | | | | | | | |
| 470 | 18×21.5 | 850 | | | | | | | | |
| | | | | | | | | | | |

CHIP TYPES