


Applications

- High Frequency Synchronous Buck Converters for Computer Processor Power
- High Frequency Isolated DC-DC Converters with Synchronous Rectification for Telecom and Industrial Use

Benefits

- Very Low $R_{DS(on)}$ at 4.5V V_{GS}
- Ultra-Low Gate Impedance
- Fully Characterized Avalanche Voltage and Current

V_{DSS}	$R_{DS(on)}$ max	Qg
20V	11m Ω	7.2nC

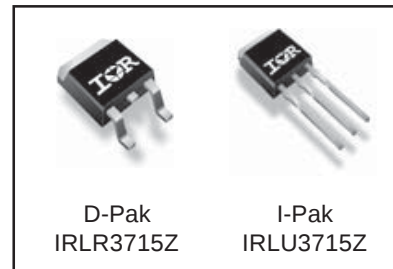

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{DS}	Drain-to-Source Voltage	20	V
V_{GS}	Gate-to-Source Voltage	± 20	
I_D @ $T_C = 25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V	49 ^④	A
I_D @ $T_C = 100^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V	35 ^④	
I_{DM}	Pulsed Drain Current ^①	200	
P_D @ $T_C = 25^\circ\text{C}$	Maximum Power Dissipation	40	W
P_D @ $T_C = 100^\circ\text{C}$	Maximum Power Dissipation	20	
	Linear Derating Factor	0.27	W/ $^\circ\text{C}$
T_J	Operating Junction and	-55 to + 175	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		
	Soldering Temperature, for 10 seconds	300 (1.6mm from case)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	3.75	$^\circ\text{C/W}$
$R_{\theta JA}$	Junction-to-Ambient (PCB Mount) ^⑤	—	50	
$R_{\theta JA}$	Junction-to-Ambient	—	110	

Notes ^① through ^⑤ are on page 11

IRLR/U3715Z

International
IR Rectifier


Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	20	—	—	V	$V_{GS} = 0V, I_D = 250\mu A$
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	13	—	mV/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 1mA$
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	8.8	11	$m\Omega$	$V_{GS} = 10V, I_D = 15A$ ③
		—	12.4	15.5		$V_{GS} = 4.5V, I_D = 12A$ ③
$V_{GS(th)}$	Gate Threshold Voltage	1.65	2.1	2.55	V	$V_{DS} = V_{GS}, I_D = 250\mu A$
$\Delta V_{GS(th)}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-4.8	—	mV/ $^\circ\text{C}$	
I_{DSS}	Drain-to-Source Leakage Current	—	—	1.0	μA	$V_{DS} = 16V, V_{GS} = 0V$
		—	—	150		$V_{DS} = 16V, V_{GS} = 0V, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{GS} = 20V$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{GS} = -20V$
gfs	Forward Transconductance	33	—	—	S	$V_{DS} = 10V, I_D = 12A$
Q_g	Total Gate Charge	—	7.2	11	nC	$V_{DS} = 10V$ $V_{GS} = 4.5V$ $I_D = 12A$ See Fig. 16
Q_{gs1}	Pre-Vth Gate-to-Source Charge	—	2.3	—		
Q_{gs2}	Post-Vth Gate-to-Source Charge	—	0.90	—		
Q_{gd}	Gate-to-Drain Charge	—	2.6	—		
Q_{godr}	Gate Charge Overdrive	—	1.4	—		
Q_{sw}	Switch Charge ($Q_{gs2} + Q_{gd}$)	—	3.5	—		
Q_{oss}	Output Charge	—	3.8	—	nC	$V_{DS} = 10V, V_{GS} = 0V$
$t_{d(on)}$	Turn-On Delay Time	—	7.8	—	ns	$V_{DD} = 10V, V_{GS} = 4.5V$ ③ $I_D = 12A$ Clamped Inductive Load
t_r	Rise Time	—	13	—		
$t_{d(off)}$	Turn-Off Delay Time	—	10	—		
t_f	Fall Time	—	4.3	—		
C_{iss}	Input Capacitance	—	810	—	pF	$V_{GS} = 0V$ $V_{DS} = 10V$ $f = 1.0MHz$
C_{oss}	Output Capacitance	—	270	—		
C_{rss}	Reverse Transfer Capacitance	—	150	—		

Avalanche Characteristics

	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy ②	—	19	mJ
I_{AR}	Avalanche Current ①	—	12	A
E_{AR}	Repetitive Avalanche Energy ①	—	4.0	mJ

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	49④	A	MOSFET symbol showing the integral reverse p-n junction diode. 
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	200		
V_{SD}	Diode Forward Voltage	—	—	1.0	V	$T_J = 25^\circ\text{C}, I_S = 12A, V_{GS} = 0V$ ③
t_{rr}	Reverse Recovery Time	—	11	17	ns	$T_J = 25^\circ\text{C}, I_F = 12A, V_{DD} = 10V$
Q_{rr}	Reverse Recovery Charge	—	3.5	5.3	nC	$di/dt = 100A/\mu s$ ③
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD)				

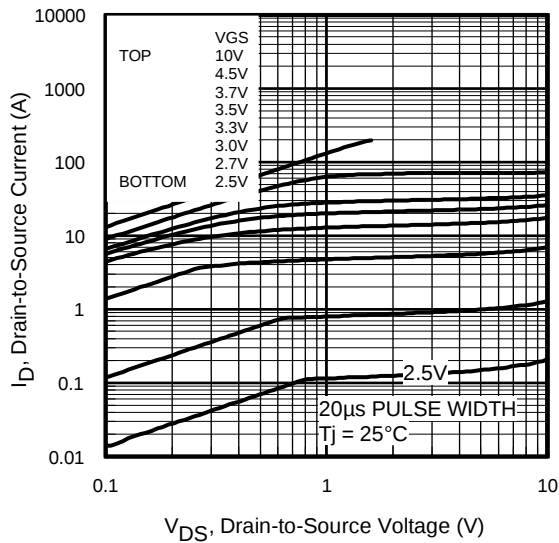


Fig 1. Typical Output Characteristics

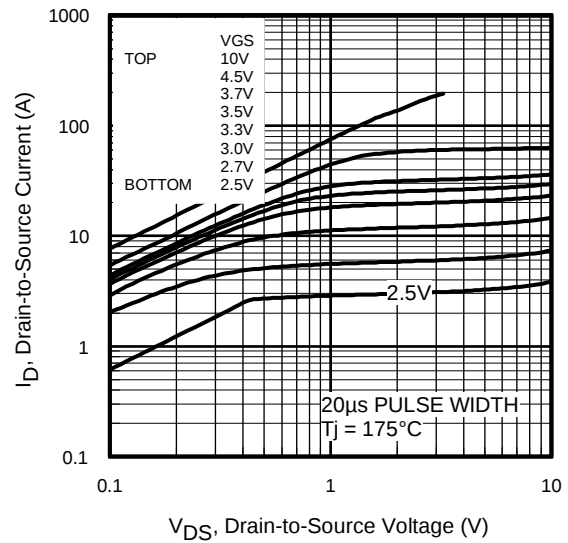


Fig 2. Typical Output Characteristics

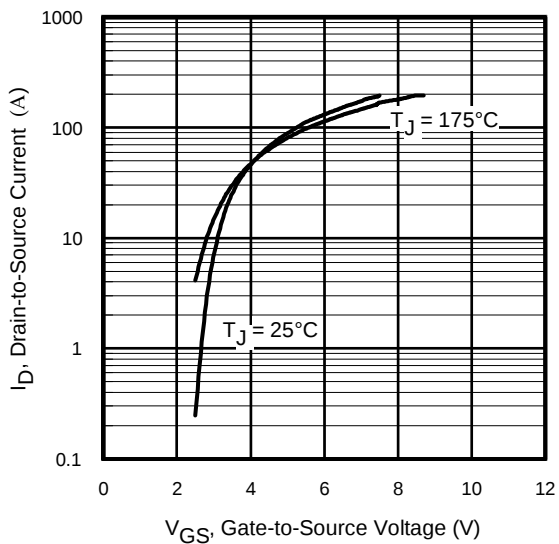


Fig 3. Typical Transfer Characteristics

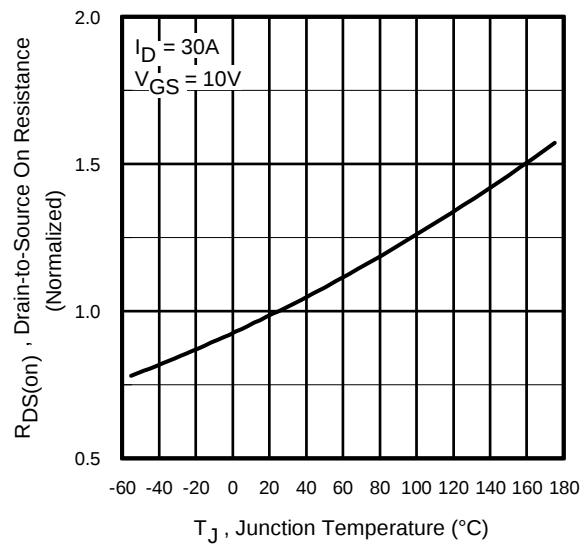


Fig 4. Normalized On-Resistance vs. Temperature

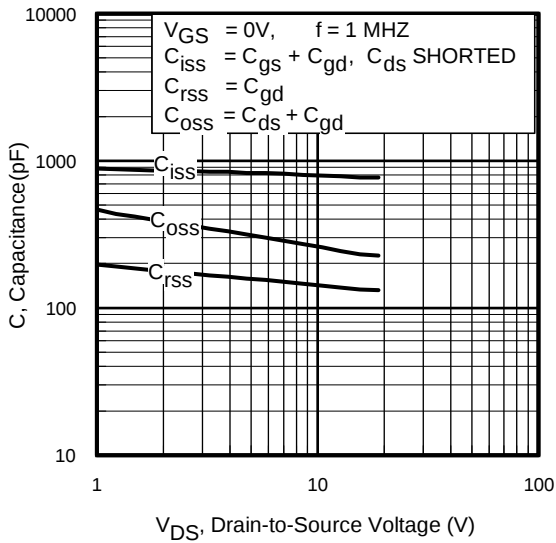


Fig 5. Typical Capacitance vs. Drain-to-Source Voltage

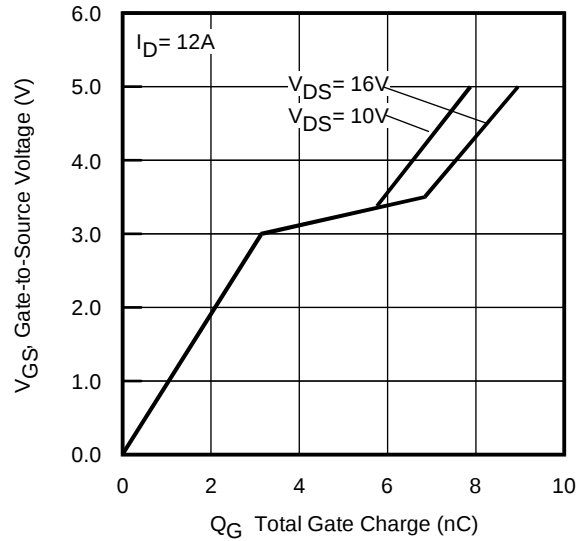


Fig 6. Typical Gate Charge vs. Gate-to-Source Voltage

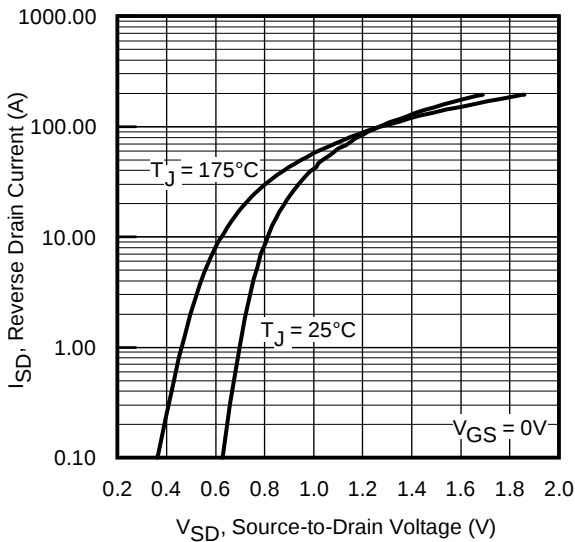


Fig 7. Typical Source-Drain Diode Forward Voltage

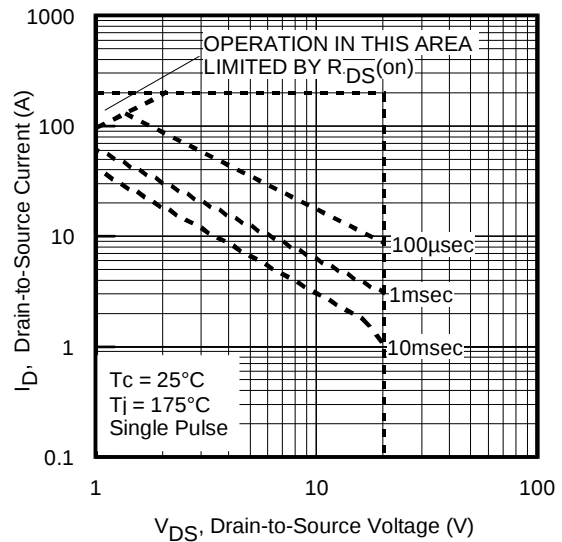


Fig 8. Maximum Safe Operating Area

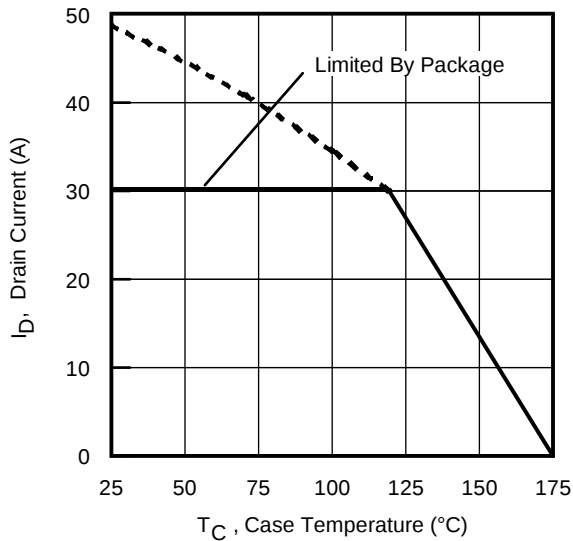


Fig 9. Maximum Drain Current vs. Case Temperature

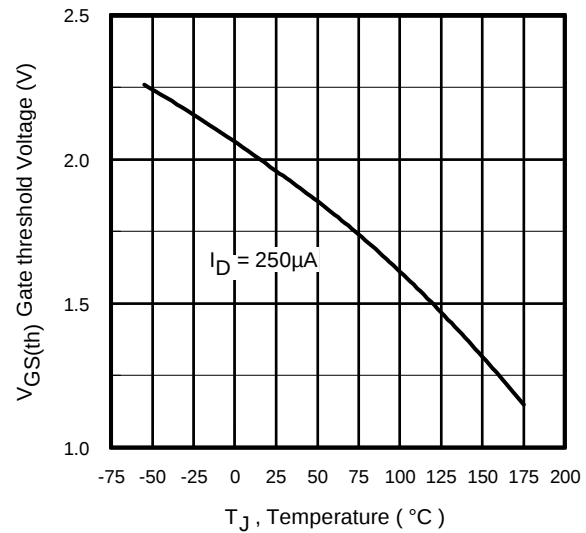


Fig 10. Threshold Voltage vs. Temperature

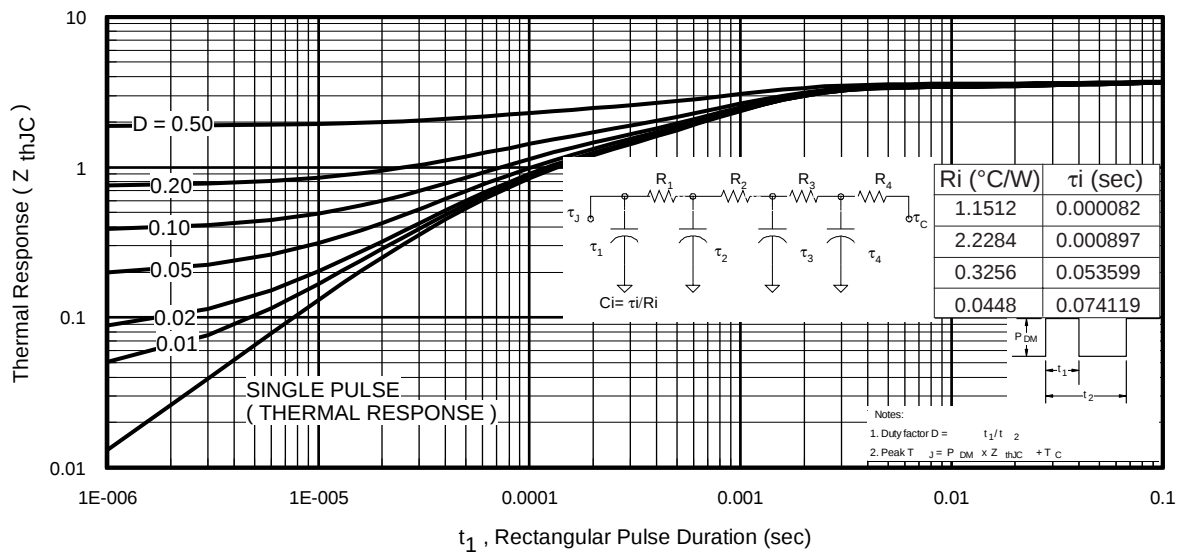


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRLR/U3715Z

International
IR Rectifier

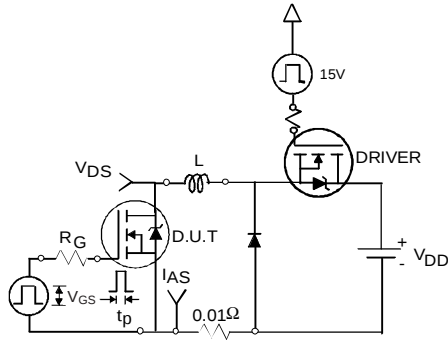


Fig 12a. Unclamped Inductive Test Circuit

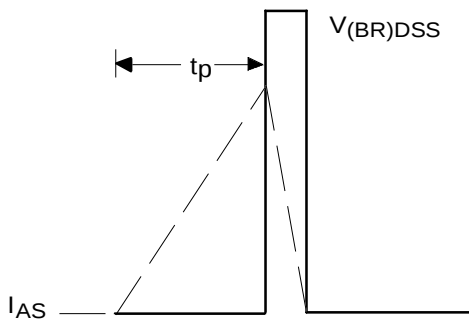


Fig 12b. Unclamped Inductive Waveforms

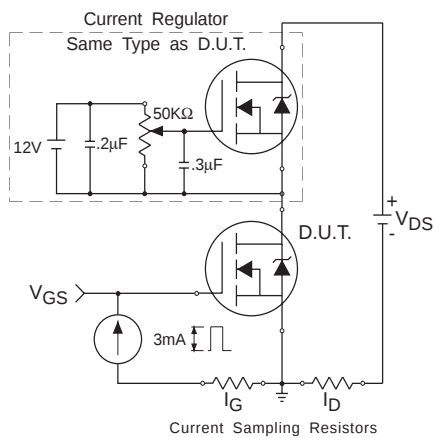


Fig 13. Gate Charge Test Circuit

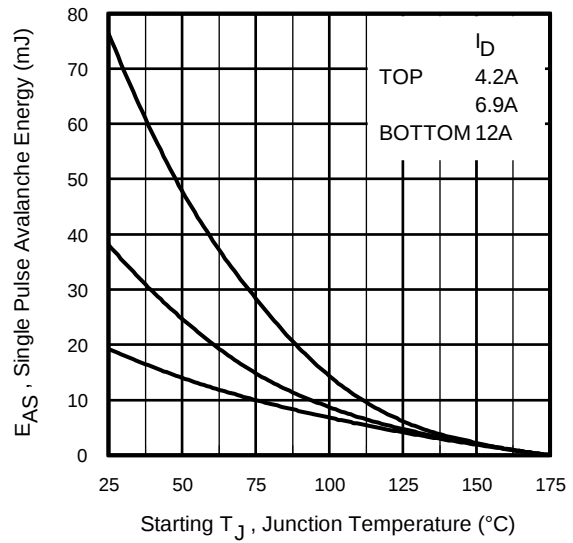


Fig 12c. Maximum Avalanche Energy vs. Drain Current

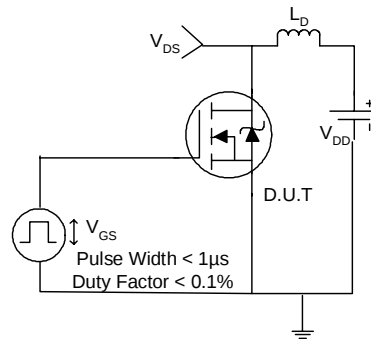


Fig 14a. Switching Time Test Circuit

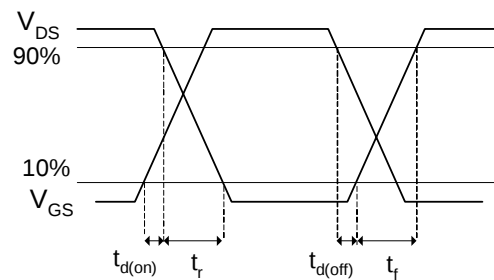


Fig 14b. Switching Time Waveforms

www.irf.com

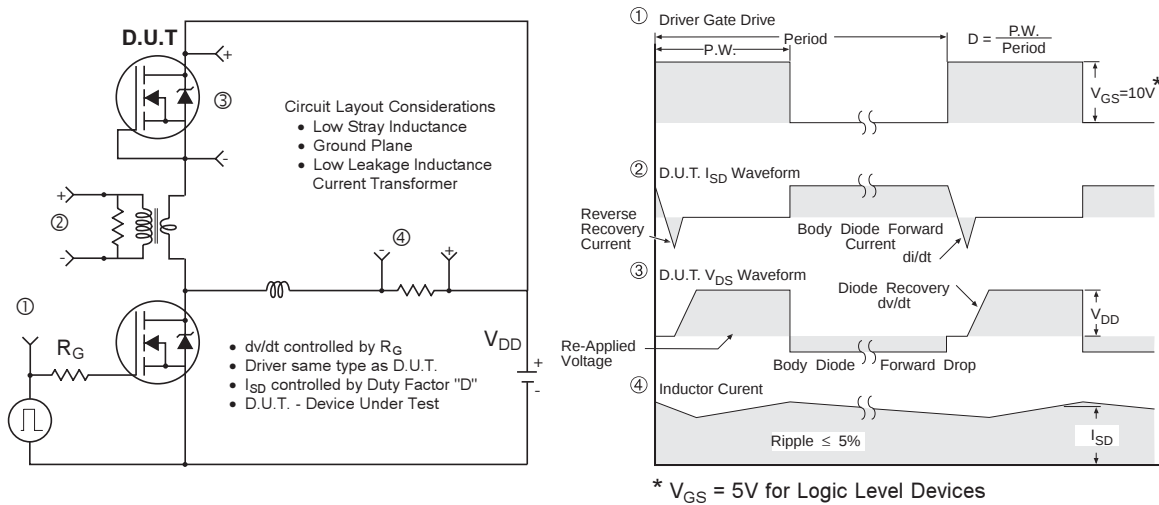


Fig 15. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

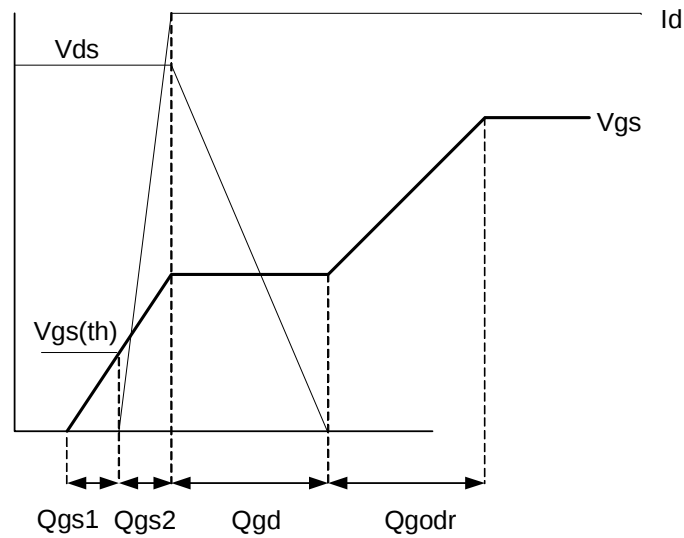


Fig 16. Gate Charge Waveform

Power MOSFET Selection for Non-Isolated DC/DC Converters

Control FET

Special attention has been given to the power losses in the switching elements of the circuit - Q1 and Q2. Power losses in the high side switch Q1, also called the Control FET, are impacted by the $R_{ds(on)}$ of the MOSFET, but these conduction losses are only about one half of the total losses.

Power losses in the control switch Q1 are given by;

$$P_{loss} = P_{conduction} + P_{switching} + P_{drive} + P_{output}$$

This can be expanded and approximated by;

$$P_{loss} = \left(I_{rms}^2 \times R_{ds(on)} \right) + \left(I \times \frac{Q_{gd}}{i_g} \times V_{in} \times f \right) + \left(I \times \frac{Q_{gs2}}{i_g} \times V_{in} \times f \right) + (Q_g \times V_g \times f) + \left(\frac{Q_{oss}}{2} \times V_{in} \times f \right)$$

This simplified loss equation includes the terms Q_{gs2} and Q_{oss} which are new to Power MOSFET data sheets.

Q_{gs2} is a sub element of traditional gate-source charge that is included in all MOSFET data sheets. The importance of splitting this gate-source charge into two sub elements, Q_{gs1} and Q_{gs2} , can be seen from Fig 16.

Q_{gs2} indicates the charge that must be supplied by the gate driver between the time that the threshold voltage has been reached and the time the drain current rises to I_{dmax} at which time the drain voltage begins to change. Minimizing Q_{gs2} is a critical factor in reducing switching losses in Q1.

Q_{oss} is the charge that must be supplied to the output capacitance of the MOSFET during every switching cycle. Figure A shows how Q_{oss} is formed by the parallel combination of the voltage dependant (non-linear) capacitance's C_{ds} and C_{dg} when multiplied by the power supply input buss voltage.

Synchronous FET

The power loss equation for Q2 is approximated by;

$$P_{loss} = P_{conduction} + P_{drive} + P_{output}^* \\ P_{loss} = \left(I_{rms}^2 \times R_{ds(on)} \right) + (Q_g \times V_g \times f) + \left(\frac{Q_{oss}}{2} \times V_{in} \times f \right) + (Q_{rr} \times V_{in} \times f)$$

*dissipated primarily in Q1.

For the synchronous MOSFET Q2, $R_{ds(on)}$ is an important characteristic; however, once again the importance of gate charge must not be overlooked since it impacts three critical areas. Under light load the MOSFET must still be turned on and off by the control IC so the gate drive losses become much more significant. Secondly, the output charge Q_{oss} and reverse recovery charge Q_{rr} both generate losses that are transferred to Q1 and increase the dissipation in that device. Thirdly, gate charge will impact the MOSFETs' susceptibility to Cdv/dt turn on.

The drain of Q2 is connected to the switching node of the converter and therefore sees transitions between ground and V_{in} . As Q1 turns on and off there is a rate of change of drain voltage dV/dt which is capacitively coupled to the gate of Q2 and can induce a voltage spike on the gate that is sufficient to turn the MOSFET on, resulting in shoot-through current. The ratio of Q_{gd}/Q_{gs1} must be minimized to reduce the potential for Cdv/dt turn on.


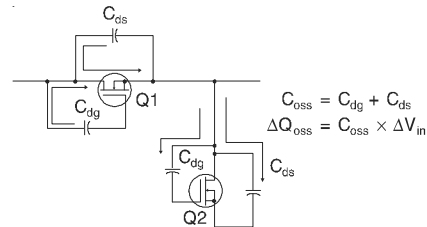


Figure A: Q_{oss} Characteristic

D-Pak (TO-252AA) Package Outline


Dimensions are shown in millimeters (inches)

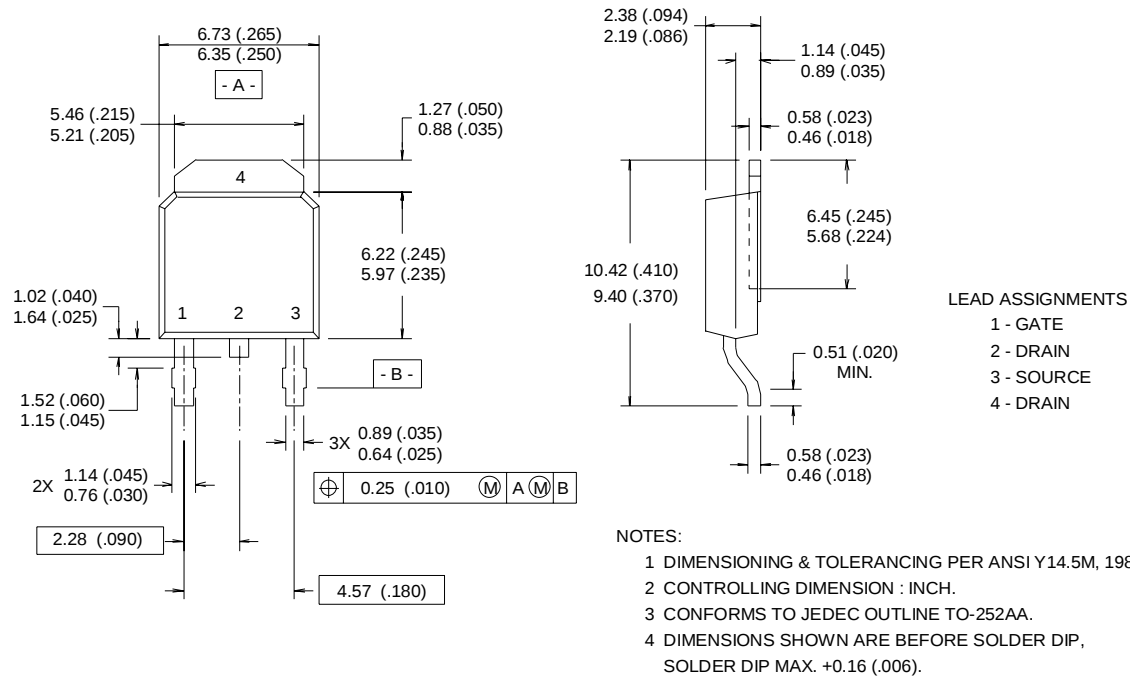

D-Pak (TO-252AA) Part Marking Information


Notes: This part marking information applies to devices produced before 02/26/2001

EXAMPLE: THIS IS AN IRLR120
WITH ASSEMBLY
LOT CODE 9U1P

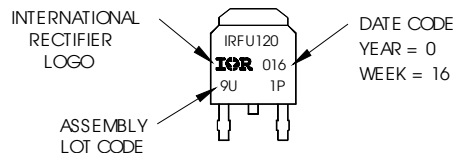

Notes: This part marking information applies to devices produced after 02/26/2001

EXAMPLE: THIS IS AN IRLR120
WITH ASSEMBLY
LOT CODE 1234
ASSEMBLED ON WW 16, 1999
IN THE ASSEMBLY LINE "A"

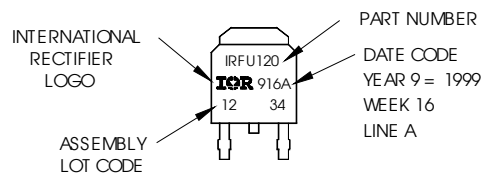

Dimensions are shown in millimeters (inches)

Technical drawing of a 3-pin connector. The drawing shows a top view and a side view. The top view is a rectangle with a central square area divided into three vertical sections labeled 1, 2, and 3. The side view shows the profile of the connector with a flat top and a rounded bottom. Dimensions are provided in inches and millimeters.

Dimensions (inches in parentheses):

- Overall width: 6.73 (.265)
- Width of section 1: 5.46 (.215)
- Width of section 2: 5.21 (.205)
- Width of section 3: 1.27 (.050)
- Width of section 4: 0.88 (.035)
- Height of section 1: 1.52 (.060)
- Height of section 2: 1.15 (.045)
- Height of section 3: 6.22 (.245)
- Height of section 4: 5.97 (.235)
- Height of section 5: 9.65 (.380)
- Height of section 6: 8.89 (.350)
- Height of section 7: 0.89 (.035)
- Height of section 8: 0.64 (.025)
- Height of section 9: 1.14 (.045)
- Height of section 10: 0.76 (.030)
- Height of section 11: 2.28 (.090)
- Height of section 12: 1.91 (.075)
- Height of section 13: 0.25 (.010)
- Height of section 14: 0.25 (.010)
- Height of section 15: 0.25 (.010)
- Height of section 16: 0.25 (.010)
- Height of section 17: 0.25 (.010)
- Height of section 18: 0.25 (.010)
- Height of section 19: 0.25 (.010)
- Height of section 20: 0.25 (.010)
- Height of section 21: 0.25 (.010)
- Height of section 22: 0.25 (.010)
- Height of section 23: 0.25 (.010)
- Height of section 24: 0.25 (.010)
- Height of section 25: 0.25 (.010)
- Height of section 26: 0.25 (.010)
- Height of section 27: 0.25 (.010)
- Height of section 28: 0.25 (.010)
- Height of section 29: 0.25 (.010)
- Height of section 30: 0.25 (.010)
- Height of section 31: 0.25 (.010)
- Height of section 32: 0.25 (.010)
- Height of section 33: 0.25 (.010)
- Height of section 34: 0.25 (.010)
- Height of section 35: 0.25 (.010)
- Height of section 36: 0.25 (.010)
- Height of section 37: 0.25 (.010)
- Height of section 38: 0.25 (.010)
- Height of section 39: 0.25 (.010)
- Height of section 40: 0.25 (.010)
- Height of section 41: 0.25 (.010)
- Height of section 42: 0.25 (.010)
- Height of section 43: 0.25 (.010)
- Height of section 44: 0.25 (.010)
- Height of section 45: 0.25 (.010)
- Height of section 46: 0.25 (.010)
- Height of section 47: 0.25 (.010)
- Height of section 48: 0.25 (.010)
- Height of section 49: 0.25 (.010)
- Height of section 50: 0.25 (.010)
- Height of section 51: 0.25 (.010)
- Height of section 52: 0.25 (.010)
- Height of section 53: 0.25 (.010)
- Height of section 54: 0.25 (.010)
- Height of section 55: 0.25 (.010)
- Height of section 56: 0.25 (.010)
- Height of section 57: 0.25 (.010)
- Height of section 58: 0.25 (.010)
- Height of section 59: 0.25 (.010)
- Height of section 60: 0.25 (.010)
- Height of section 61: 0.25 (.010)
- Height of section 62: 0.25 (.010)
- Height of section 63: 0.25 (.010)
- Height of section 64: 0.25 (.010)
- Height of section 65: 0.25 (.010)
- Height of section 66: 0.25 (.010)
- Height of section 67: 0.25 (.010)
- Height of section 68: 0.25 (.010)
- Height of section 69: 0.25 (.010)
- Height of section 70: 0.25 (.010)
- Height of section 71: 0.25 (.010)
- Height of section 72: 0.25 (.010)
- Height of section 73: 0.25 (.010)
- Height of section 74: 0.25 (.010)
- Height of section 75: 0.25 (.010)
- Height of section 76: 0.25 (.010)
- Height of section 77: 0.25 (.010)
- Height of section 78: 0.25 (.010)
- Height of section 79: 0.25 (.010)
- Height of section 80: 0.25 (.010)
- Height of section 81: 0.25 (.010)
- Height of section 82: 0.25 (.010)
- Height of section 83: 0.25 (.010)
- Height of section 84: 0.25 (.010)
- Height of section 85: 0.25 (.010)
- Height of section 86: 0.25 (.010)
- Height of section 87: 0.25 (.010)
- Height of section 88: 0.25 (.010)
- Height of section 89: 0.25 (.010)
- Height of section 90: 0.25 (.010)
- Height of section 91: 0.25 (.010)
- Height of section 92: 0.25 (.010)
- Height of section 93: 0.25 (.010)
- Height of section 94: 0.25 (.010)
- Height of section 95: 0.25 (.010)
- Height of section 96: 0.25 (.010)
- Height of section 97: 0.25 (.010)
- Height of section 98: 0.25 (.010)
- Height of section 99: 0.25 (.010)
- Height of section 100: 0.25 (.010)

Other features:

- Section 1: 1.52 (.060)
- Section 2: 1.15 (.045)
- Section 3: 6.22 (.245)
- Section 4: 5.97 (.235)
- Section 5: 9.65 (.380)
- Section 6: 8.89 (.350)
- Section 7: 0.89 (.035)
- Section 8: 0.64 (.025)
- Section 9: 1.14 (.045)
- Section 10: 0.76 (.030)
- Section 11: 2.28 (.090)
- Section 12: 1.91 (.075)
- Section 13: 0.25 (.010)
- Section 14: 0.25 (.010)
- Section 15: 0.25 (.010)
- Section 16: 0.25 (.010)
- Section 17: 0.25 (.010)
- Section 18: 0.25 (.010)
- Section 19: 0.25 (.010)
- Section 20: 0.25 (.010)
- Section 21: 0.25 (.010)
- Section 22: 0.25 (.010)
- Section 23: 0.25 (.010)
- Section 24: 0.25 (.010)
- Section 25: 0.25 (.010)
- Section 26: 0.25 (.010)
- Section 27: 0.25 (.010)
- Section 28: 0.25 (.010)
- Section 29: 0.25 (.010)
- Section 30: 0.25 (.010)
- Section 31: 0.25 (.010)
- Section 32: 0.25 (.010)
- Section 33: 0.25 (.010)
- Section 34: 0.25 (.010)
- Section 35: 0.25 (.010)
- Section 36: 0.25 (.010)
- Section 37: 0.25 (.010)
- Section 38: 0.25 (.010)
- Section 39: 0.25 (.010)
- Section 40: 0.25 (.010)
- Section 41: 0.25 (.010)
- Section 42: 0.25 (.010)
- Section 43: 0.25 (.010)
- Section 44: 0.25 (.010)
- Section 45: 0.25 (.010)
- Section 46: 0.25 (.010)
- Section 47: 0.25 (.010)
- Section 48: 0.25 (.010)
- Section 49: 0.25 (.010)
- Section 50: 0.25 (.010)
- Section 51: 0.25 (.010)
- Section 52: 0.25 (.010)
- Section 53: 0.25 (.010)
- Section 54: 0.25 (.010)
- Section 55: 0.25 (.010)
- Section 56: 0.25 (.010)
- Section 57: 0.25 (.010)
- Section 58: 0.25 (.010)
- Section 59: 0.25 (.010)
- Section 60: 0.25 (.010)
- Section 61: 0.25 (.010)
- Section 62: 0.25 (.010)
- Section 63: 0.25 (.010)
- Section 64: 0.25 (.010)
- Section 65: 0.25 (.010)
- Section 66: 0.25 (.010)
- Section 67: 0.25 (.010)
- Section 68: 0.25 (.010)
- Section 69: 0.25 (.010)
- Section 70: 0.25 (.010)
- Section 71: 0.25 (.010)
- Section 72: 0.25 (.010)
- Section 73: 0.25 (.010)
- Section 74: 0.25 (.010)
- Section 75: 0.25 (.010)
- Section 76: 0.25 (.010)
- Section 77: 0.25 (.010)
- Section 78: 0.25 (.010)
- Section 79: 0.25 (.010)
- Section 80: 0.25 (.010)
- Section 81: 0.25 (.010)
- Section 82: 0.25 (.010)
- Section 83: 0.25 (.010)
- Section 84: 0.25 (.010)

Technical drawing of a mechanical part with dimensions and notes.

Dimensions (mm):

- 2.38 (.094)
- 2.19 (.086)
- 0.58 (.023)
- 0.46 (.018)
- 6.45 (.245)
- 5.68 (.224)
- 1.14 (.045)
- 0.89 (.035)
- 0.58 (.023)
- 0.46 (.018)

NOTES:

- 1 DIMEN
- 2 CONTI
- 3 CONF
- 4 DIMEN

SOLDE


- 1 - GATE
- 2 - DRAIN
- 3 - SOURCE
- 4 - DRAIN

1 DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
2 CONTROLLING DIMENSION : INCH.
3 CONFORMS TO JEDEC OUTLINE TO-252AA.
4 DIMENSIONS SHOWN ARE BEFORE SOLDER DIP,
SOLDER DIP MAX. +0.16 (.006).

EXAMPLE: THIS IS AN IRFR120
WITH ASSEMBLY
LOT CODE 9U1P

INTERNATIONAL
RECTIFIER
LOGO

ASSEMBLY
LOT CODE




✓ DATE CODE
YEAR = 0
WEEK = 16

Notes: This part marking information applies to devices produced after 02/26/2001

EXAMPLE: THIS IS AN IRFR120
WITH ASSEMBLY
LOT CODE 5678
ASSEMBLED ON WW 19, 1999
IN THE ASSEMBLY LINE "A"

INTERNATIONAL
RECTIFIER
LOGO


ASSEMBLY
LOT CODE




PART NUMBER
DATE CODE
YEAR 9 = 1999
WEEK 19
LINE A

D-Pak (TO-252AA) Tape & Reel Information

Dimensions are shown in millimeters (inches)

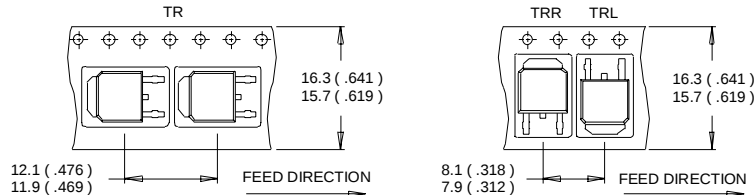

- NOTES :
1. CONTROLLING DIMENSION : MILLIMETER.
 2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
 3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

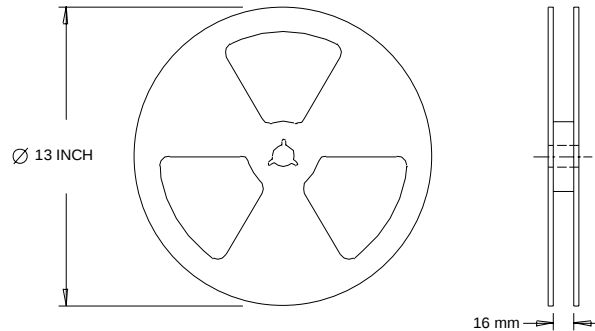

- NOTES :
1. OUTLINE CONFORMS TO EIA-481.

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting $T_J = 25^\circ\text{C}$, $L = 0.27\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 12\text{A}$.
- ③ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
- ④ Calculated continuous current based on maximum allowable junction temperature. Package limitation current is 30A.
- ⑤ When mounted on 1" square PCB (FR-4 or G-10 Material). For recommended footprint and soldering techniques refer to application note #AN-994.

Data and specifications subject to change without notice.
This product has been designed and qualified for the Industrial market.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information. 04/03