


TYPES SN54192, SN54193, SN54L192, SN54L193, SN54LS192, SN54LS193, SN74192, SN74193, SN74LS192, SN74LS193 SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)

DECEMBER 1972—REVISED DECEMBER 1983

- Cascading Circuitry Provided Internally
- Synchronous Operation
- Individual Preset to Each Flip-Flop
- Fully Independent Clear Input

SN54192, SN54193, SN54LS192, SN54LS193 ... J OR W PACKAGE
SN54L192, SN54L193 ... J PACKAGE
SN74192, SN74193 ... J OR N PACKAGE
SN74LS192, SN74LS193 ... D, J OR N PACKAGE

(TOP VIEW)



TYPES	TYPICAL COUNT FREQUENCY	TYPICAL MAXIMUM POWER DISSIPATION
'192, '193	32 MHz	325 mW
'L192, 'L193	7 MHz	43 mW
'LS192, 'LS193	32 MHz	95 mW

description

These monolithic circuits are synchronous reversible (up/down) counters having a complexity of 55 equivalent gates. The '192, 'L192, and 'LS192 circuits are BCD counters and the '193, 'L193 and 'LS193 are 4-bit binary counters. Synchronous operation is provided by having all flip-flops clocked simultaneously so that the outputs change coincidentally with each other when so instructed by the steering logic. This mode of operation eliminates the output counting spikes which are normally associated with asynchronous (ripple-clock) counters.

The outputs of the four master-slave flip-flops are triggered by a low-to-high-level transition of either count (clock) input. The direction of counting is determined by which count input is pulsed while the other count input is high.

All four counters are fully programmable; that is, each output may be preset to either level by entering the desired data at the data inputs while the load input is low. The output will change to agree with the data inputs independently of the count pulses. This feature allows the counters to be used as modulo-N dividers by simply modifying the count length with the preset inputs.

A clear input has been provided which forces all outputs to the low level when a high level is applied. The clear function is independent of the count and load inputs. The clear, count, and load inputs are buffered to lower the drive requirements. This reduces the number of clock drivers, etc., required for long words.

These counters were designed to be cascaded without the need for external circuitry. Both borrow and carry outputs are available to cascade both the up- and down-counting functions. The borrow output produces a pulse equal in width to the count-down input when the counter underflows. Similarly, the carry output produces a pulse equal in width to the count-up input when an overflow condition exists. The counters can then be easily cascaded by feeding the borrow and carry outputs to the count-down and count-up inputs respectively of the succeeding counter.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

	SN54'	SN54L'	SN54LS'	SN74'	SN74LS'	UNIT
Supply voltage, V_{CC} (see Note 1)	7	8	7	7	7	V
Input voltage	5.5	5.5	7	5.5	7	V
Operating free-air temperature range	-55 to 125			0 to 70		°C
Storage temperature range	-65 to 150			-65 to 150		°C

NOTE 1: Voltage values are with respect to network ground terminal.

PRODUCTION DATA

This document contains information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS


POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-755

3
TTL DEVICES

TYPES SN54192, SN54L192, SN54LS192, SN74192, SN74LS192
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)

logic diagram

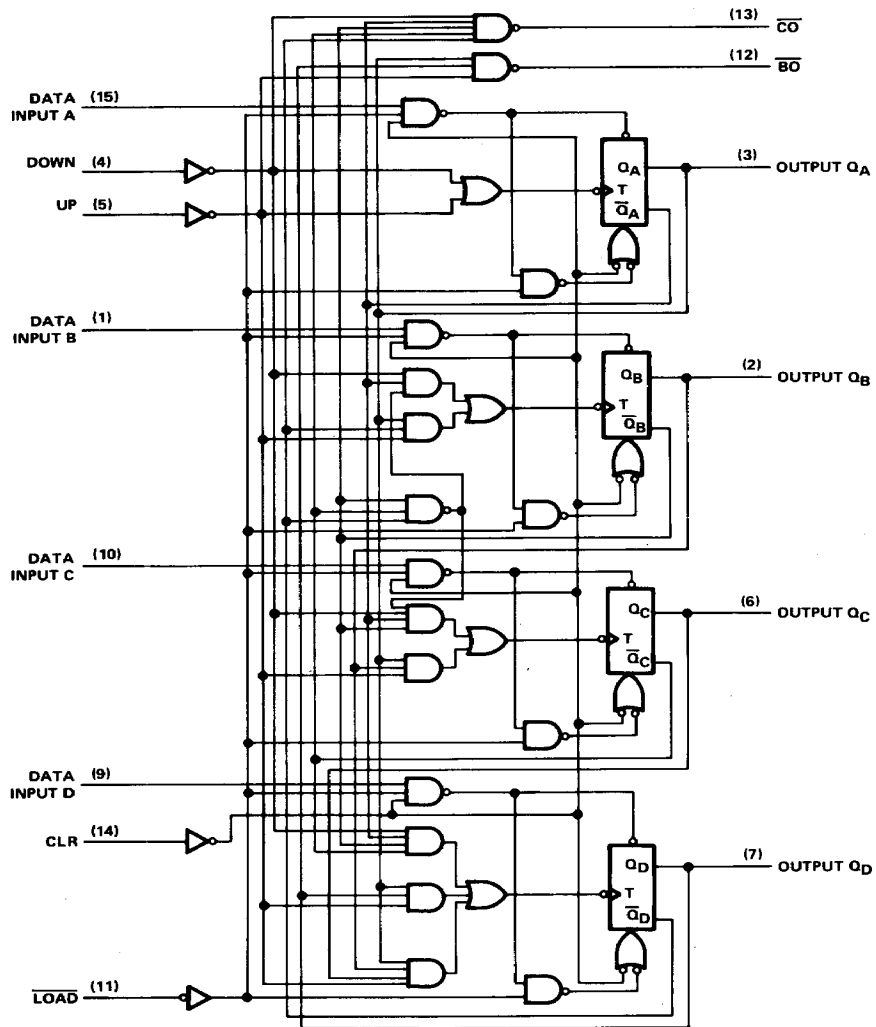

Pin numbers shown on logic notation are for D, J or N packages.

3

TTL DEVICES

3-756


TEXAS
INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

This Material Copyrighted By Its Respective Manufacturer

TYPES SN54193, SN54L193, SN54LS193, SN74193, SN74LS193
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)

logic diagram

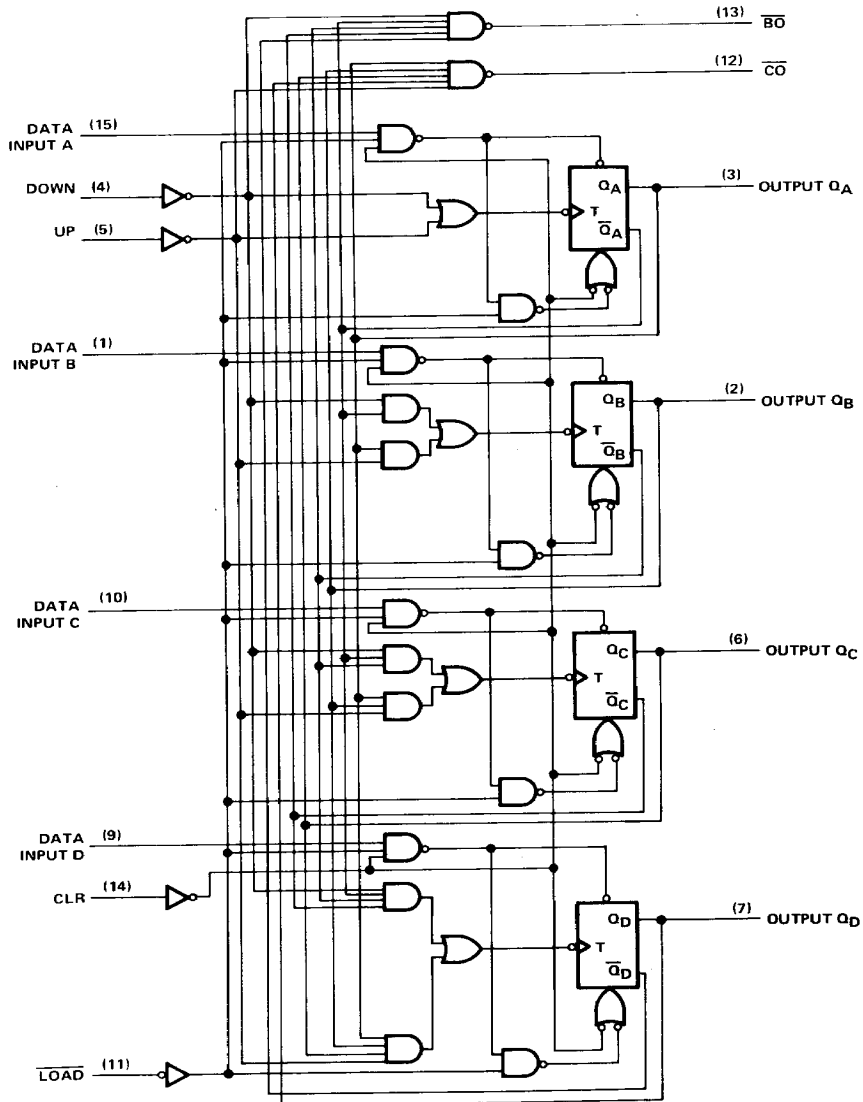

Pin numbers shown on logic notation are for D, J or N packages.

3

TTL DEVICES



TEXAS
INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-757





**TYPES SN54192, SN54193, SN54L192, SN54L193, SN54LS192, SN54LS193,
SN74192, SN74193, SN74LS192, SN74LS193
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)**

logic symbols

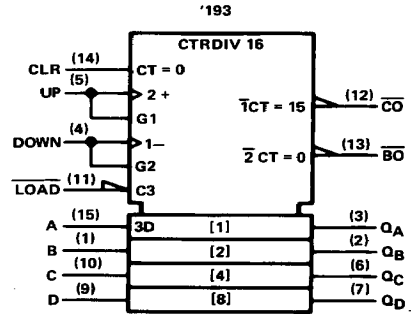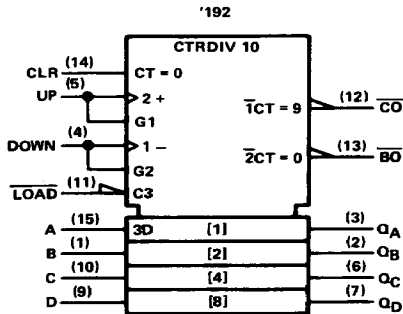

Pin numbers shown on logic notation are for D, J or N packages.

schematics of inputs and outputs




TYPES SN54192, SN54L192, SN54LS192, SN74192, SN74LS192 SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)

'192, 'L192, 'LS192 DECADE COUNTERS

typical clear, load, and count sequences

Illustrated below is the following sequence:

1. Clear outputs to zero.
2. Load (preset) to BCD seven.
3. Count up to eight, nine, carry, zero, one, and two.
4. Count down to one, zero, borrow, nine, eight, and seven.

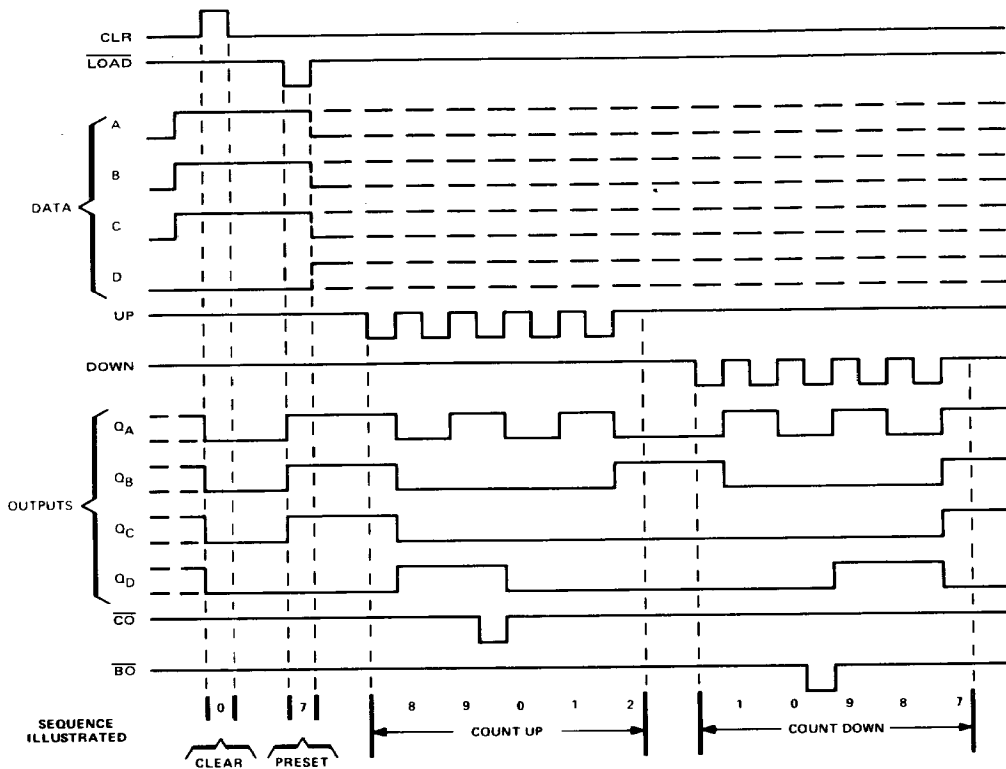

NOTES: A. Clear overrides load, data, and count inputs.

B. When counting up, count-down input must be high; when counting down, count-up input must be high.

TEXAS
INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-759

3
TTL DEVICES

TYPES SN54193, SN54L193, SN54LS193, SN74193, SN74LS193
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)

'193, 'L193, 'LS193 BINARY COUNTERS


typical clear, load, and count sequences

Illustrated below is the following sequence:

1. Clear outputs to zero.
2. Load (preset) to binary thirteen.
3. Count up to fourteen, fifteen, carry, zero, one, and two.
4. Count down to one, zero, borrow, fifteen, fourteen, and thirteen.

3

TTL DEVICES

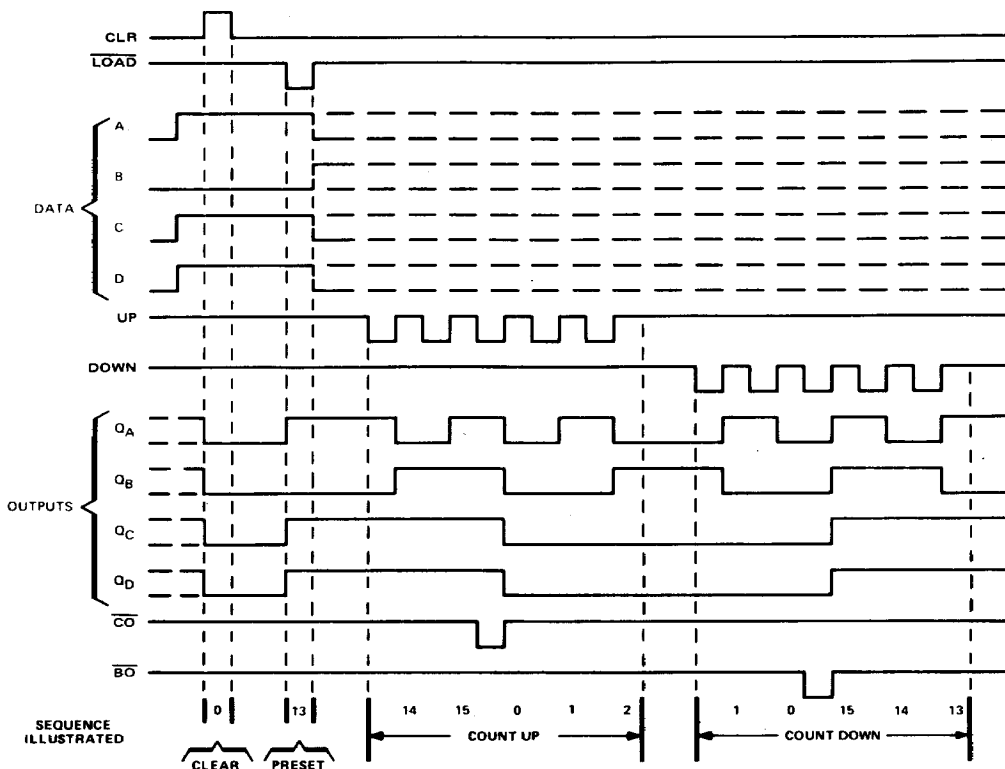

NOTES: A. Clear overrides load, data, and count inputs.

B. When counting up, count-down input must be high; when counting down, count-up input must be high.

TYPES SN54192, SN54193, SN74192, SN74193 SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)

recommended operating conditions

				SN54192 SN54193			SN74192 SN74193			UNIT	
				MIN	NOM	MAX	MIN	NOM	MAX		
V _{CC}	Supply voltage			4.5	5	5.5	4.75	5	5.25	V	
I _{OH}	High-level output current			-0.4			-0.4			mA	
I _{OL}	Low-level output current			16			16			mA	
f _{clock}	Clock frequency			0	25		0	25		MHz	
t _w	Width of any input pulse			20			20			ns	
t _{su}	Data setup time, (see Figure 1)			20			20			ns	
t _h	Hold time			Data, high or low			0			ns	
				LOAD			3				
T _A	Operating free-air temperature			-55			125		0	70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN54192 SN54193		SN74192 SN74193		UNIT
		MIN	TYP‡ MAX	MIN	TYP‡ MAX	
V _{IH} High-level input voltage		2		2		V
V _{IL} Low-level input voltage		0.8		0.8		V
V _{IK} Input clamp voltage	V _{CC} = MIN, I _I = -12 mA	-1.5		-1.5		V
V _{OH} High-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = 0.8 V, I _{OH} = -0.4 mA	2.4	3.4	2.4	3.4	V
V _{OL} Low-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = 0.8 V, I _{OL} = 16 mA	0.2	0.4	0.2	0.4	V
I _I Input current at maximum input voltage	V _{CC} = MAX, V _I = 5.5 V	1		1		mA
I _{IH} High-level input current	V _{CC} = MAX, V _I = 2.4 V	40		40		µA
I _{IL} Low-level input current	V _{CC} = MAX, V _I = 0.4 V	-1.6		-1.6		mA
I _{OS} Short-circuit output current§	V _{CC} = MAX	-20	-65	-18	-65	mA
I _{CC} Supply current	V _{CC} = MAX, See Note 2	65	89	65	102	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time.

NOTE 2: I_{CC} is measured with all outputs open, clear and load inputs grounded, and all other inputs at 4.5 V.

switching characteristics, V_{CC} = 5 V, T_A = 25°C

PARAMETER†	FROM INPUT	TO OUTPUT	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f _{max}			C _L = 15 pF, R _L = 400 Ω, See Figures 1 and 2	25	32		MHz
t _{PLH}	UP	$\overline{CO}$			17	26	ns
t _{PHL}					16	24	
t _{PLH}	DOWN	$\overline{BO}$			16	24	ns
t _{PHL}					16	24	
t _{PLH}	UP OR DOWN	Q			25	38	ns
t _{PHL}					31	47	
t _{PLH}	$\overline{LOAD}$	Q			27	40	ns
t _{PHL}					29	40	
t _{PHL}	CLR	Q		22	35	ns	

¶ f_{max} = maximum clock frequency

t_{PLH} = propagation delay time, low-to-high-level output

t_{PHL} = propagation delay time, high-to-low-level output

3

TTL DEVICES

TEXAS
INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-761

TYPES SN64L192, SN54L193 SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)

recommended operating conditions

		SN54L192 SN54L193			UNIT
		MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	V
V _{IH}	High-level input voltage	2			V
V _{IL}	Low-level input voltage			0.7	V
I _{OH}	High-level output current			-0.1	mA
I _{OL}	Low-level output current			2	mA
f _{clock}	Clock frequency	0		3	MHz
t _w	Width of any input pulse	200			ns
t _{su}	Data setup time, (see Figure 1)	100			ns
t _h	Data hold time	0			ns
T _A	Operating free-air temperature range	-55		125	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN54L192 SN54L193			UNIT
		MIN	TYP‡	MAX	
V _{IK}	V _{CC} = MIN, I _I = -12 mA			-1.5	V
V _{OH}	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = 0.7 V, I _{OH} = -0.1 mA	2.4	3.3		V
V _{OL}	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = 0.7 V, I _{OL} = 2 mA		0.15	0.3	V
I _I	V _{CC} = MAX, V _I = 5.5 V			0.1	mA
I _{IH}	V _{CC} = MAX, V _I = 2.4 V			10	µA
I _{IL}	V _{CC} = MAX, V _I = 0.3 V			-0.18	mA
I _{OS} §	V _{CC} = MAX	-3		-15	mA
I _{CC}	V _{CC} = MAX, See Note 2		8.5	15	mA

†For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.

‡All typical values are at V_{CC} = 5 V, T_A = 25°C.

§Not more than one output should be shorted at a time.

NOTE 2: I_{CC} is measured with all outputs open, clear and load inputs grounded, and all other inputs at 4.5 V.

switching characteristics, V_{CC} = 5 V, T_A = 25°C

PARAMETER†	FROM INPUT	TO OUTPUT	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f _{max}			C _L = 50 pF, R _L = 4 kΩ, See Figures 1 and 2	3	7		MHz
t _{PLH}	UP	$\overline{CO}$			65	130	ns
t _{PHL}					65	130	
t _{PLH}	DOWN	$\overline{BO}$			65	130	ns
t _{PHL}					65	130	
t _{PLH}	UP OR DOWN	Q			104	200	ns
t _{PHL}					135	240	
t _{PLH}	$\overline{LOAD}$	Q			130	240	ns
t _{PHL}					105	200	
t _{PLH}	CLR	Q			110	200	ns
t _{PHL}							

†f_{max} = maximum clock frequency

t_{PLH} = propagation delay time, low-to-high-level output

t_{PHL} = propagation delay time, high-to-low-level output

TYPES SN54LS192, SN54LS193, SN74LS192, SN74LS193 **SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)**

recommended operating conditions

		SN54LS192 SN54LS193			SN74LS192 SN74LS193			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
I _{OH}	High-level output current			-400			-400	μA
I _{OL}	Low-level output current			4			8	mA
f _{clock}	Clock frequency	0		25	0		25	MHz
t _w	Width of any input pulse	20			20			ns
t _{su}	Clear inactive-state setup time	15			15			ns
	Load inactive-state setup time	15			15			ns
	Data setup time (see Figure 1)	20			20			ns
t _h	Data hold time	5			5			ns
T _A	Operating free-air temperature range	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN54LS192 SN54LS193			SN74LS192 SN74LS193			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IH}	High-level input voltage		2			2		V
V _{IL}	Low-level input voltage			0.7			0.8	V
V _{IK}	Input clamp voltage	V _{CC} = MIN, I _I = -18 mA			-1.5			V
V _{OH}	High-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{IL} max, I _{OH} = -400 μA			2.5	3.4		V
V _{OL}	Low-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, I _{OL} = 4 mA			0.25	0.4	0.15	V
		V _{IL} = V _{IL} max, I _{OL} = 8 mA					0.35	0.5
I _I	Input current at maximum input voltage	V _{CC} = MAX, V _I = 7 V				0.1		mA
I _{IH}	High-level input current	V _{CC} = MAX, V _I = 2.7 V				20		μA
I _{IL}	Low-level input current	V _{CC} = MAX, V _I = 0.4 V				-0.4		mA
I _{OS}	Short-circuit output current§	V _{CC} = MAX			-20	-100	-20	mA
I _{CC}	Supply current	V _{CC} = MAX, See Note 2			19	34	19	mA

†For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.

‡All typical values are at V_{CC} = 5 V, T_A = 25°C.

§Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

NOTE 2: I_{CC} is measured with all outputs open, clear and load inputs grounded, and all other inputs at 4.5 V.

switching characteristics, V_{CC} = 5 V, T_A = 25°C

PARAMETER	FROM INPUT	TO OUTPUT	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f _{max}			C _L = 15 pF, R _L = 2 kΩ, See Figures 1 and 2	25	32		MHz
t _{PLH}	UP	$\overline{CO}$			17	26	ns
t _{PHL}					18	24	
t _{PLH}	DOWN	$\overline{BO}$			16	24	ns
t _{PHL}					15	24	
t _{PLH}	UP OR DOWN	Q			27	38	ns
t _{PHL}					30	47	
t _{PLH}	$\overline{LOAD}$	Q			24	40	ns
t _{PHL}					25	40	
t _{PHL}	CLR	Q			23	35	ns

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-763

**TYPES SN54192, SN54193, SN54L192, SN54L193, SN54LS192, SN54LS193
SN74192, SN74193, SN74LS192, SN74LS193
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)**

PARAMETER MEASUREMENT INFORMATION

3 TTL DEVICES

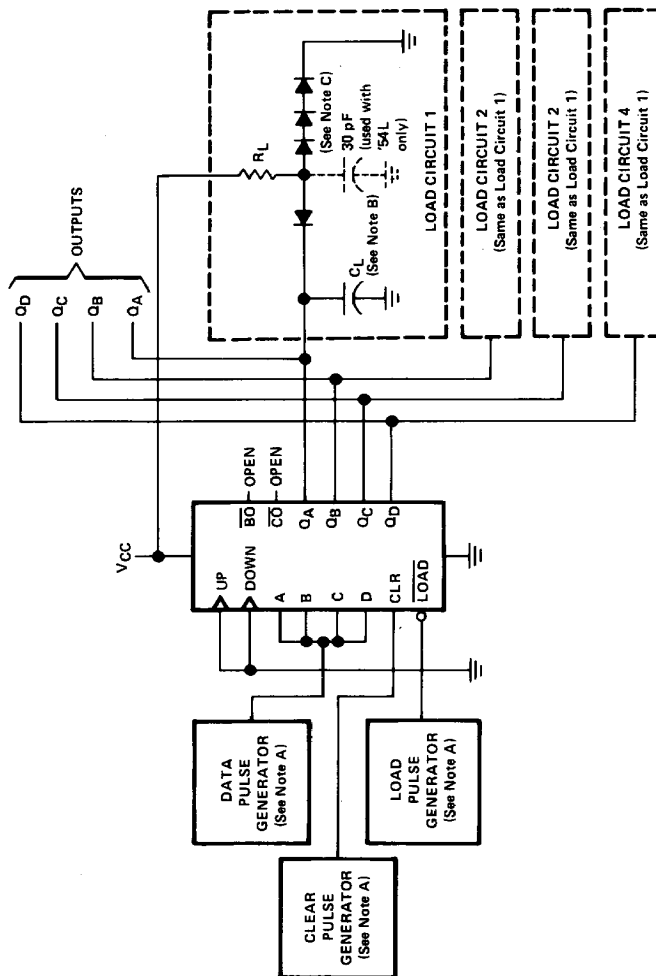


TEST CIRCUIT

- NOTES:**
- A. The pulse generators have the following characteristics: $Z_{out} \approx 50 \Omega$ and for the data pulse generator PRR ≤ 500 kHz, duty cycle = 50%; for the load pulse generator PRR is two times data PRR, duty cycle = 50%.
 - B. C_L includes probe and jig capacitance.
 - C. Diodes are 1N3064 or equivalent.
 - D. t_r and $t_f \leq 7$ ns for '192, '193, 'LS192, and 'LS193; ≤ 25 ns for 'L192 and 'L193.
 - E. V_{ref} is 1.5 volts for '192 and '193; 1.3 volts for 'L192, 'L193, 'LS192, and 'LS193.

FIGURE 1A — CLEAR, SETUP AND LOAD TIMES

**TYPES SN54192, SN54193, SN54L192, SN54L193, SN54LS192, SN54LS193,
SN74192, SN74193, SN74LS192, SN74LS193
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)**

PARAMETER MEASUREMENT INFORMATION

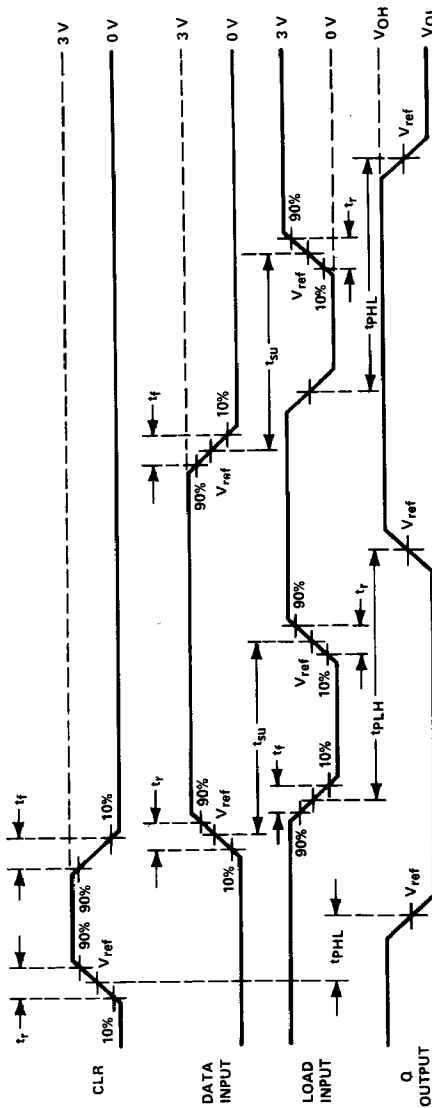

VOLTAGE WAVEFORMS

- NOTES: A. The pulse generators have the following characteristics: $Z_{out} \approx 50 \Omega$ and for the data pulse generator PRR ≤ 500 kHz, duty cycle = 50%; for the load pulse generator PRR is two times data PRR, duty cycle = 50%.
B. C_L includes probe and jig capacitance.
C. Diodes are 1N3064 or equivalent.
D. t_r and $t_f \leq 7$ ns for '192, '193, 'LS192, and 'LS193; ≤ 25 ns for 'L192 and 'L193.
E. V_{ref} is 1.5 volts for '192 and '193; 1.3 volts for 'LS192, 'LS193, and 'LS193.

FIGURE 1B - CLEAR, SETUP, AND LOAD TIMES

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265


TTL DEVICES

3

3-765

**TYPES SN54192, SN54193, SN54L192, SN54L193, SN54LS192, SN54LS193,
SN74192, SN74193, SN74LS192, SN74LS193
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)**

PARAMETER MEASUREMENT INFORMATION

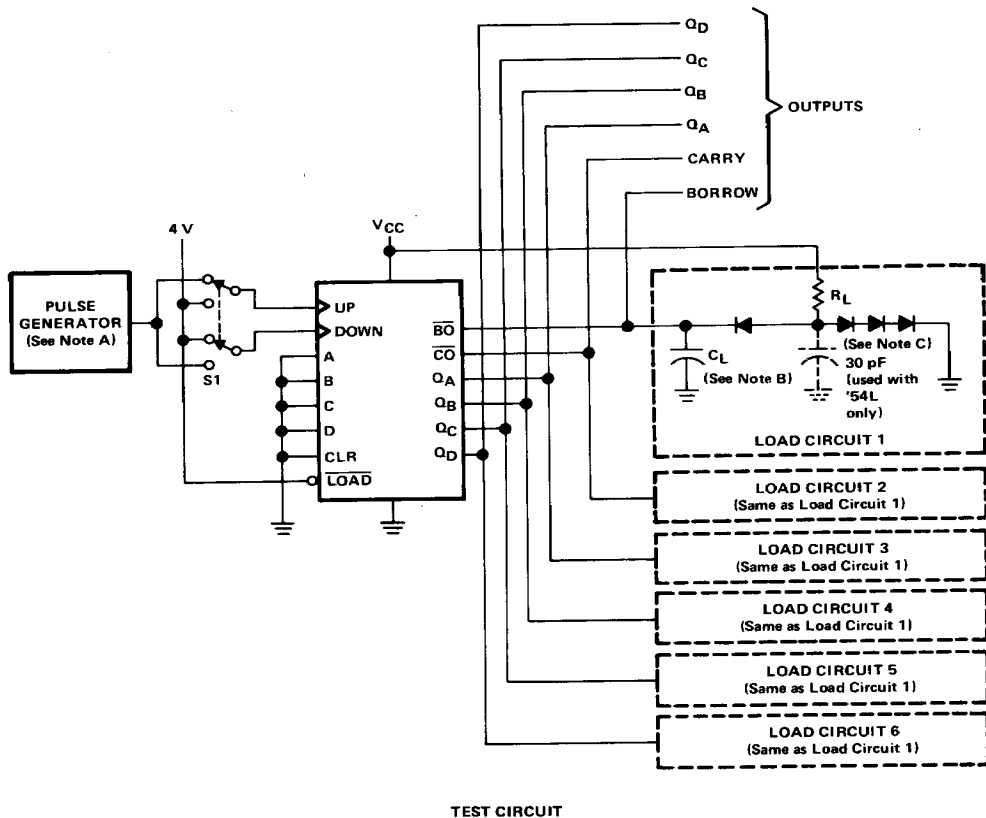


TEST CIRCUIT

- NOTES:**
- A. The pulse generator has the following characteristics: $PRR \leq 1 \text{ MHz}$, $Z_{out} \approx 50 \Omega$, duty cycle = 50%.
 - B. C_L includes probe and jig capacitance.
 - C. Diodes are 1N3064 or equivalent.
 - D. Count-up and count-down pulse shown are for the '193, 'L193, and 'LS193 binary counters. Count cycle for '192, 'L192, and 'LS192 decade counters is 1 through 10.
 - E. Waveforms for outputs Q_A , Q_B , and Q_C are omitted to simplify the drawing.
 - F. t_r and $t_f \leq 7 \text{ ns}$ for '192, '193, 'LS192, and 'LS193; $\leq 25 \text{ ns}$ for 'L192 and 'L193.
 - G. V_{ref} is 1.5 volts for '192 and '193; 1.3 volts for 'L192, 'L193, 'LS192, and 'LS193.

FIGURE 2A — PROPAGATION DELAY TIMES

**TYPES SN54192, SN54193, SN54L192, SN54L193, SN54LS192, SN54LS193,
SN74192, SN74193, SN74LS192, SN74LS193
SYNCHRONOUS 4-BIT UP/DOWN COUNTERS (DUAL CLOCK WITH CLEAR)**

PARAMETER MEASUREMENT INFORMATION

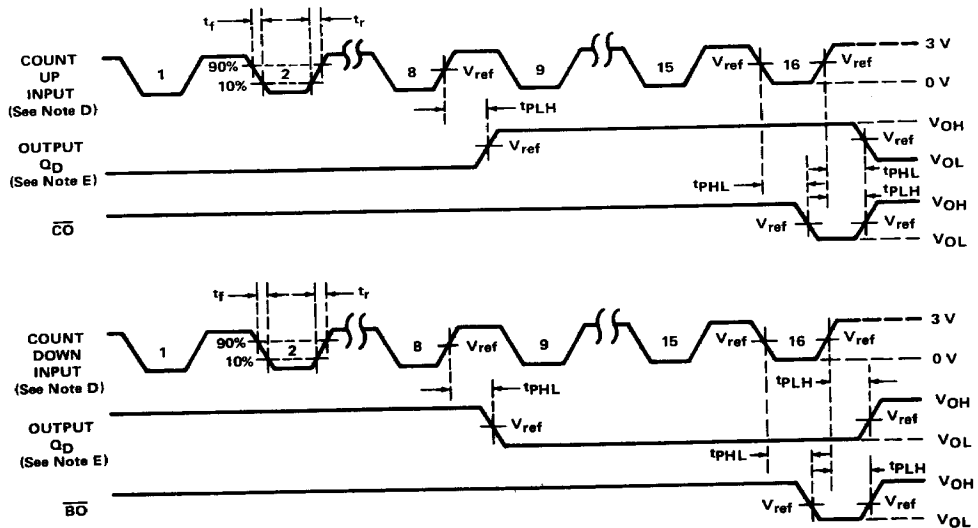

VOLTAGE WAVEFORMS

- NOTES:
- A. The pulse generator has the following characteristics: $PRR \leq 1 \text{ MHz}$, $Z_{out} \approx 50 \Omega$, duty cycle = 50%.
 - B. C_L includes probe and jig capacitance.
 - C. Diodes are 1N3064 or equivalent.
 - D. Count-up and count-down pulse shown are for the '193, 'L193, and 'LS193 binary counters. Count cycle for '192, 'L192, and 'LS192 decade counters is 1 through 10.
 - E. Waveforms for outputs Q_A , Q_B , and Q_C are omitted to simplify the drawing.
 - F. t_r and $t_f \leq 7 \text{ ns}$ for '192, '193, 'LS192, and 'LS193; $\leq 25 \text{ ns}$ for 'L192 and 'L193.
 - G. V_{ref} is 1.5 volts for '192 and '193; 1.3 volts for 'L192, 'L193, 'LS192, and 'LS193.

FIGURE 2B - PROPAGATION DELAY TIMES

3

TTL DEVICES

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 225012 • DALLAS, TEXAS 75285

3-767