

Digital Transistors (Built-in Resistors)

J-STD-002 and JESD22-B102

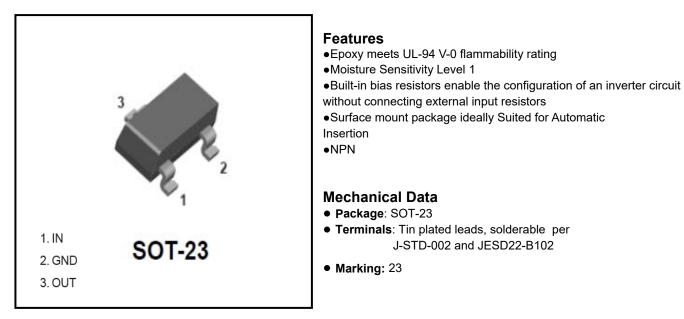

■Equivalent circuit



■Maximum Ratings (Ta=25°C Unless otherwise specified)

ITEM	SYMBOL	UNIT	CONDITIONS	VALUE
Supply Voltage	VCC	V		50
Input Voltage	VIN	V		-10 to +30
Collector Current	IC	mA		100
Power Dissipation	PD	mW		200
Junction Temperature	Tj	°C		150
Storage Temperature	TSTG	°C		-55 to +150

DTC143ECA

■Electrical Characteristics (Ta=25°C unless otherwise specified)

ITEM	SYMBOL	UNIT	CONDITIONS	MIN	ТҮР	МАХ
Input voltage	VI _(off)	V	VCC=5V,Ic=100uA	0.5		
	VI _(on)	V	V0=0.3V,Ic=20mA			3.0
Output voltage	Vo _(on)	V	lo /li =10mA/0.5 mA			0.3
Output current	I _{O(off)}	uA	VCC=50V, Vi=0			0.5
DC current gain	GI		Vo=5V, lo =10mA	20		
Input resistance	R ₁	kΩ		3.29	4.7	6.11
Resistance ratio	R ₂ /R ₁			0.8	1	1.2
Transition frequency	fT	MHz	Vo=10V,IO=5mA,f=100MHz		250	


Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
DTC143ECA	F2	Approximate 0.009	3000	30000	120000	7" reel

2/5


DTC143ECA


■ Characteristics (Typical)

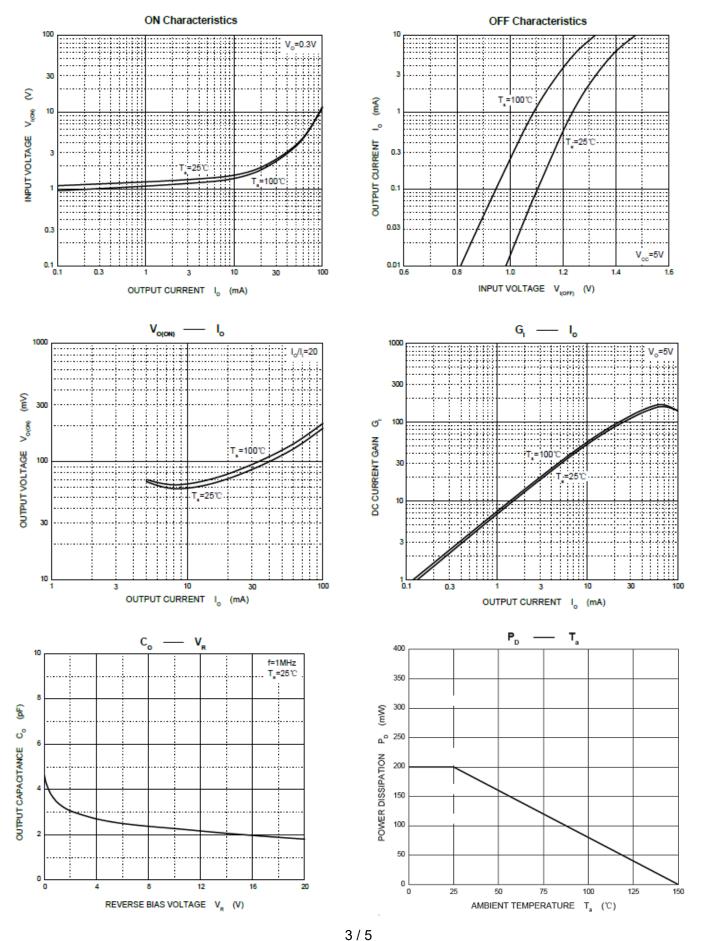


Yangzhou Yangjie Electronic Technology Co., Ltd.

■SOT-23 Package Outline Dimensions








Symbol	Dimensions Ir	n Millimeters	Dimensions In Inches		
	Min	Max	Min	Max	
A	0.900	1.150	0.035	0.045	
A1	0.000	0.100	0.000	0.004	
A2	0.900	1.050	0.035	0.041	
b	0.300	0.500	0.012	0.020	
c	0.100	0.200	0.004	0.008	
D	2.800	3.000	0.110	0.118	
E	1.200	1. 400	0.047	0.055	
E1	2. 250	2.550	0.089	0.100	
e	0.95	OTYP	0. 037TYP		
el	1.800	2.000	0.071	0.079	
L	0.55	OREF	0.022REF		
LI	0.300	0.500	0.012	0.020	
θ	0°	8°	0°	8°	

■SOT-23Suggested Pad Layout



4/5

DTC143ECA

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.